



# Workflow Developer Guide

version 11.8


# Table of Contents

<b>ATOM Workflow Development - High Level View</b>	<b>4</b>
<b>Outline of the document</b>	<b>4</b>
<b>Network Automation &amp; MOPs</b>	<b>6</b>
Network Services	6
Network MOPs	6
<b>ATOM Workflow</b>	<b>7</b>
<b>Technical requirements for developing Workflow in ATOM</b>	<b>7</b>
<b>Workflow Package Development</b>	<b>8</b>
Create a Workflow package	8
Update the Dependencies & Version in build.gradle	9
Archive the Workflow Package	11
<b>Developing Workflows - BPMN/DMN Modelling</b>	<b>12</b>
Package Explorer	12
BPMN Diagram	14
DMN Diagram	14
DMN Decision table	15
Deploy & Validate	15
Use Case 1 - Software Upgrade	16
Figure 1 - BPMN Diagram for SMU with Ping check	18
Figure 2 - BPMN Diagram for SMU with Async Notification	18
Use Case 2 - Config Provisioning	20
User Inputs Form	20
Service Task to configure the Device	22
Use Case 3 - L3 Service Provisioning	24
Use Case 4 - CLA Remediation	25
<b>Deploying &amp; Operating on Workflows</b>	<b>29</b>
<b>Swagger/OpenAPI Integration</b>	<b>30</b>
<b>Appendix</b>	<b>37</b>
<b>ATOM Workflow FAQs &amp; Examples</b>	<b>37</b>
<b>ATOM Workflow Activities</b>	<b>38</b>
Timer	38

Sub-process	40
Signal End Event & Boundary Event	42
Decision box	45
Multi-instance parallel execution	47
New user input to existing inputs	49
Add new XML tag to the existing payload	50
Restconf & RPC call to ATOM	51
How Workflow Can Program Against Various Events in ATOM	57
NAAS-EVENT	57
TSDB Alerts	58
Delegate Classes	58
AtomRpcDelegate	59
AtomRestconfDelegate	59
AtomEventsSubscriptionDelegate	60
http-connector	60
Scripting support in ATOM workflow	61
External Python Code Invocation	62
Procedure - 1 (Python2)	62
Sample groovy code for invocation of external python script	62
Sample content of script_python.py	63
Procedure - 2 (Python3)	64
Package structure	64
Python Code Execution	65
invoke-python-function (single string arg)	65
invoke-python-function (single int arg)	65
invoke-python-snippet	66
invoke-python-file	67
Sample groovy code for invocation of external python script	67
Sample content of script_python.py	68
Device Connection Timeout	69
Handling larger responses from device	70
Commenting code	71
Error handling	72
Custom form fieldTypes in ATOM workflow	72
Examples for custom fieldTypes	73
Validations/Constraints for custom form fields	82
<b>ATOM SDK</b>	<b>85</b>
Introduction	85
ATOM SDK folder hierarchy	85

Setting up the environment for ATOM Package Plugin	86
Prerequisites	86
Setting up the environment in Ubuntu	86
Setting up the environment in Windows	86
Setting up the repository for developing packages	87
Migration of Workflows	91
<b>ATOM API Development and Testing Reference</b>	<b>91</b>
<b>References</b>	<b>91</b>
YANG	91
RESTCONF	91
Gradle	91
BPMN	91
DMN	91

## ATOM Workflow Development - High Level View

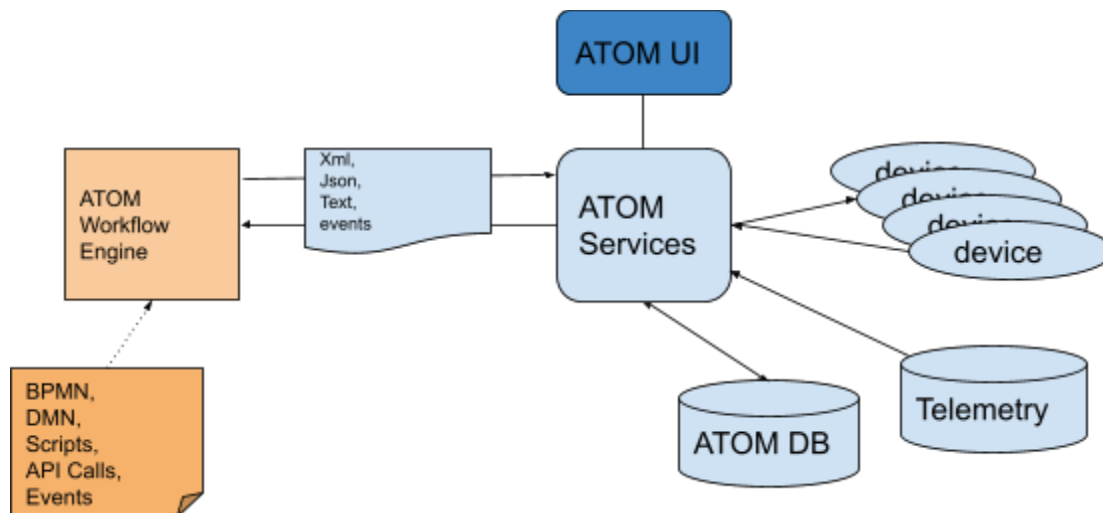

## Outline of the document

ATOM Platform provides users to develop with various extensions to out-of-the box capabilities.

- 1) **Device Drivers** - Device Drivers allow ATOM to work with devices to Collect configuration, Provision Configuration, Collect Performance & Other Operational Data, Execute Show and Diagnostic Commands.

- a) Configuration Discovery & Provisioning
- b) Performance & Inventory Collection (SNMP, SNMP Trap, Syslog, Telemetry)
- 2) Network Automation
  - a) Stateful Services like Application Delivery, L3 VPN, etc.,
  - b) MOP Automation like Software Upgrade, Password Rotation etc.,**

The document covers Network MOP Automation Development Flows. Following is a high level breakdown of the content:

1. Workflow Package Development
2. Developing Workflows - BPMN Modelling
3. Deploying Workflow Package

In the [Appendix](#), additional examples, library utils, ATOM SDK and FAQs are mentioned in detail.

# Network Automation & MOPs

Network automation scenarios fall into following categories:

## 1. Network Services

**a. Stateful Services** - Networking provisioning use case with following life cycle:

- i. Discovery - Discovery of existing Services
- ii. Create - Create a green field service
- iii. Update - Update Service. This may be repeated multiple times
- iv. Delete - Retire the service

Examples:

- i. Application Deployment in Data Center
- ii. Layer-3 VPN
- iii. Layer-2 VPN
- iv. Private Cloud to Public Cloud Interconnect

What's involved in developing Stateful services ? - Refer to ATOM Network Services Development SDK

## 2. Network MOPs

**a. One-Time or Task Oriented Provisioning Activities** - These activities may be repeated from time-to-time but do not need information on prior state.

Examples below:

- i. Password Rotation
- ii. SNMP Community String, SNMP Trap, Syslog config rotation
- iii. Configuration Migration projects like - IPV4 to IPV6 Migration

**b. One-Time or Task Oriented Operational Activities** - Network MOPs typically involve Network maintenance activities like the following:

- i. Device Software Image Upgrade
- ii. Device RMA
- iii. Device Configuration Rollback to a prior state

**c. Stateless actions in the context of Stateful Services** -

- i. Pre & Post-Checks during Service Creation
- ii. Device or Service Alert Triggering a Service Change

Typical activities in a MOP are as follows:

- Performing Actions on Device - Show commands, Exec Commands, Config Commands
- Handling/Parsing Device Response
- Checkpointing various states for comparison
- Conditions on checkpoints


- End user Input

ATOM Workflow provides a mechanism to define various Activities required to build Network MOP.

## ATOM Workflow

ATOM Workflow applications work on top of services/apis enabled by various ATOM APIs, Device APIs, Direct CLI invocations, Events etc.,. These applications involve a set of activities or sub-tasks that include fetching data from devices, pushing configurations to devices, executing show commands, executing exec operations like ping, install, acting on device events, timers, end user actions etc.,. Applications usually need to express logic in terms of steps (sequential, parallel, conditional etc) and ATOM Workflow is a natural fit for those requirements.

ATOM workflow engine implements BPMN standard processes. ATOM being a YANG model driven platform, it exposes APIs and models expressed in YANG schema, although ATOM also lets application developers to by-pass device yang models and use CLIs or device native apis directly.

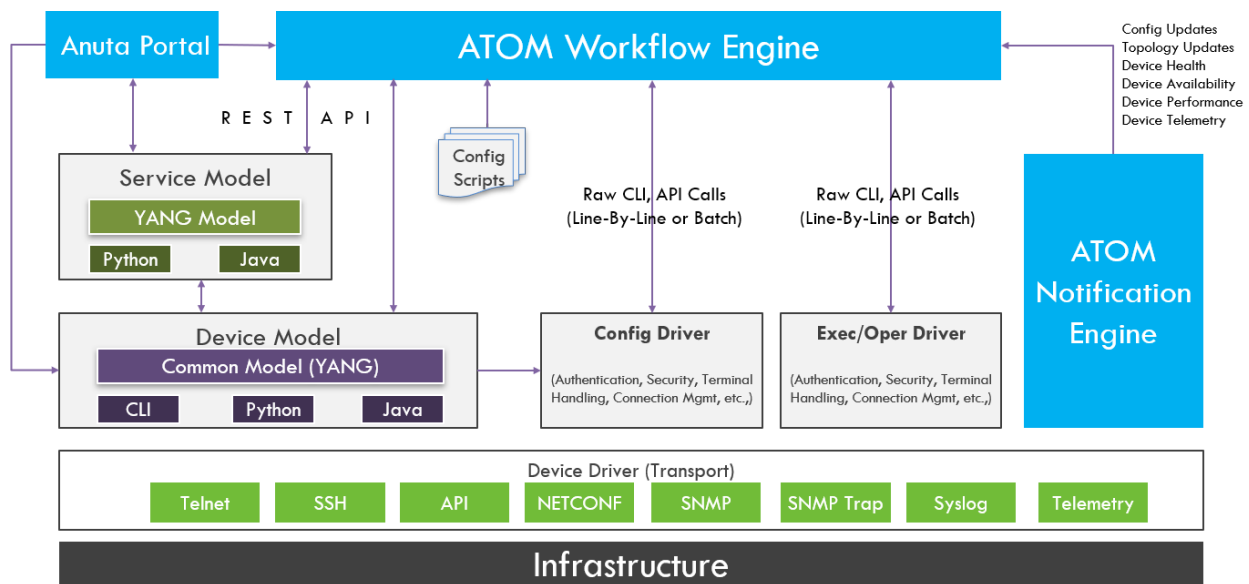

Workflow Engine Communication

## Technical requirements for developing Workflow in ATOM

Workflow Automation can be a combination of Stateless and Stateful actions. In such scenarios MOP will contain stateless actions like pre-checks, while performing API invocations against Device or Service Models to perform stateful transactional action.

Overall Developers would need some familiarity with the following

1. [BPMN](#), [DMN](#)
2. ATOM Workflow APIs
3. Device configurations (CLI)
4. A Scripting language (Python, Groovy, JavaScript)
5. ATOM SDK and Tooling - ATOM uses a package structure to ingest application models and programming. Workflow is also ingested using the same package structure. ATOM provides SDK and [GRADLE](#) based Tooling to help develop these packages. In essence, workflow development starts with package development. In the following sections we will elaborate the ATOM SDK and tooling in relation to workflow development. ATOM SDK uses the Gradle build system.
6. [YANG](#) (Especially, when Device yang models are used).
7. [RESTCONF](#)

## Workflow Package Development

### Create a Workflow package

After the successful one time setup of the ATOM SDK environment (Refer Appendix section [ATOM SDK](#)), you can create the required workflow package as below.

1. Run below command to create the package:

```
python sdk.py -c
```

*create.py*: This script helps you create different types of package: service package, device package or device driver package.

```
root@User:/home/supriha/Desktop/AtomSDK/atom-package-plugin# python sdk.py -c
Running create script
This script creates a package

Select from the following options
1.SERVICE_MODEL
2.DEVICE
3.DEVICE_DRIVER
choose any one from above: 
```

2. Select the type SERVICE\_MODEL package type as shown below

```
This script creates a package

Select from the following options
1.SERVICE_MODEL
2.DEVICE
3.DEVICE_DRIVER
choose any one from above:1
enter the name of the package: 
```

3. Enter the name of the package and other inputs as shown below

```

This script creates a package
Select from the following options
1.SERVICE_MODEL
2.DEVICE
3.DEVICE_DRIVER
choose any one from above:1
enter the name of the package:serverportautomation
enter the description (optional):
enter the atom version (optional):
enter the absolute directory path to create the package (optional):
creating the current directory
destination is: /home/anuta/Music/atomsdk/serverportautomation
initializing the package
:wrapper
:init
BUILD SUCCESSFUL
Total time: 3.866 secs


This build could be faster, please consider using the Gradle Daemon: https://docs.gradle.org/2.10/userguide/gradle_daemon.html
Enter the dependency dictionary (optional) :
creating the folder structure
:init
The build file 'build.gradle' already exists. Skipping build initialization.
:init SKIPPED
:initPackage
{} created. src
{} created. src/main
{} created. src/main/scripts
{} created. src/main/vendor
{} created. src/main/model
{} created. src/main/resources
BUILD SUCCESSFUL
Total time: 6.449 secs

This build could be faster, please consider using the Gradle Daemon: https://docs.gradle.org/2.10/userguide/gradle_daemon.html

```

After the successful run of the above build, the service package folder structure for workflow purpose is created.

In the vendor folder create a new folder named *workflow*. After development of workflow bpmn as described in section [Developing Workflows - BPMN Modelling](#) place the bpmn in this folder as shown below.

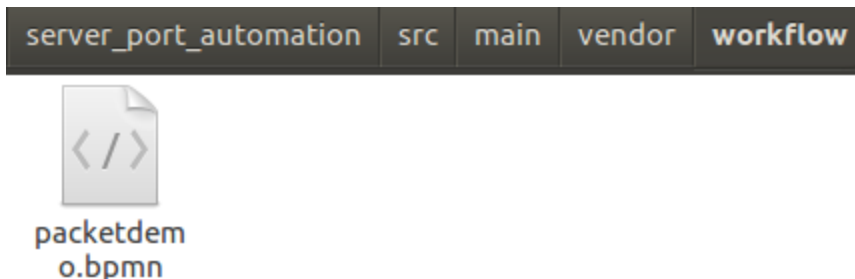

## Update the Dependencies & Version in build.gradle

After a successful creation of a workflow package, there could be some additional package(s) required as 'dependencies'. Accordingly modify the default dependencies listed in the build.gradle file, which is located in the root level of the created package.

```

group 'com.anuta.ncx.packages'
version '8.0.0.0'
apply plugin: 'ear'
apply plugin: 'java'
apply plugin: 'ncx-package-plugin'

repositories {
    mavenCentral()
    flatDir(dirs: "/home/anutauser/Desktop/codegen/atomsdk/packages")
}

dependencies {
    earlib group: 'com.anuta.ncx.packages', name: 'servicemodel', version: '7.0.4.0', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'Anuta', version: '7.0.2.0', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'bitarray', version: '7.0.0.0', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'abstractdevicemodels', version: '7.0.4.0', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'devicemodel', version: '7.5.0.0', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'pyangbind', version: '7.0.0.0', ext: 'zip'
}

packageXml {
    name 'server_port_automation'
    type 'SERVICE_MODEL'
    description 'server-port-automation Base Package'
    moduleName 'server_port_automation'
    ncxVersion '[8.0.0.0,)'
    deployOnAgent false
    autoStart false
}

buildscript {
    repositories {
        mavenCentral()
        flatDir(dirs: "/home/anutauser/Desktop/codegen/atomsdk/packages")
    }
    dependencies {
        classpath "com.anuta.ncx.packages:ncx-package-plugin:7.0.0.0"
        classpath "org.apache.httpcomponents:httpmime:4.5.3"
        classpath "org.apache.cleressa.ext:org.json.simple:0.4"
    }
}

```

In scenarios where MOP performs stateless actions on the device directly either via CLI/Native APIs make sure dependency of the servicemodel package is there. This package has the required library utilities for connecting to the device and executing CLIs/APIs.

In scenarios where MOP performs API invocations against Device or Service Models, make sure dependency of that respective model package is there.

Let's consider a MOP which performs both stateless actions and API invocations against Juniper Device Models, then make sure dependency of *servicemodel-7.0.4.0*, *juniper-8.0.0.1*, *juniper\_cli-8.0.0.1* and *workflowlib-7.5.1.0* are mentioned as below. (The package names are a combination of the name of the package and the version number separated by a hyphen)

```

dependencies {
    earlib group: 'com.anuta.ncx.packages', name: 'servicemodel', version: '7.0.4.0', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'juniper', version: '8.0.0.1', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'juniper_cli', version: '8.0.0.1', ext: 'zip'
    earlib group: 'com.anuta.ncx.packages', name: 'workflowlib', version: '8.1.0.0', ext: 'zip'
}

```

## Resolve the dependencies

Run the command : **gradle build --refresh-dependencies**

Successful execution of this command ensures that the dependencies mentioned in the *build.gradle* file are mapped fine.


## Update the version

In the “*build.gradle*” file, metadata about the package is present in the version & packageXml object. Update the version based on the revision of the service package you are working on.


```
group 'com.anuta.ncx.packages'
version '8.0.0.0'
apply plugin: 'ear'
apply plugin: 'java'
apply plugin: 'ncx-package-plugin'
```

## Archive the Workflow Package

Once the Workflow bpmn is defined and placed in the vendor/workflow folder of the package structure, use the gradle task “gradle archive” for creating the uploadable zip with its dependencies.

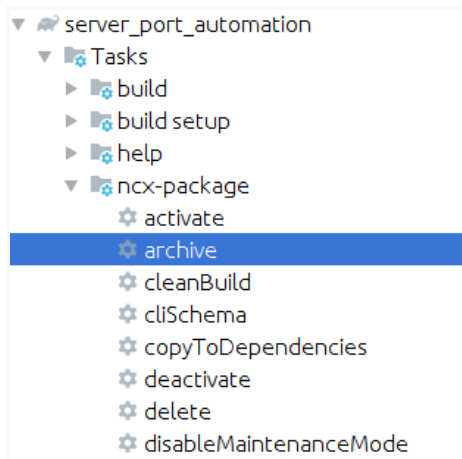

The zip will be stored into the build folder like below

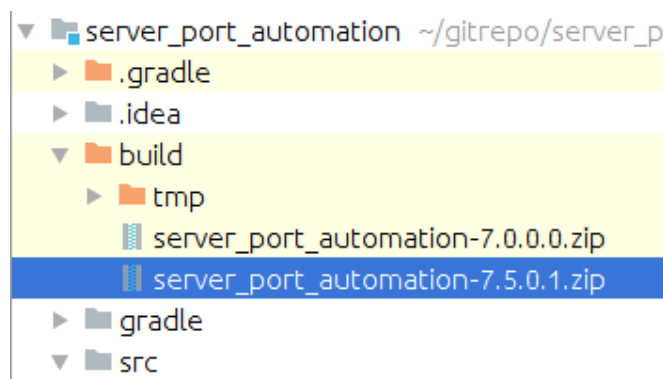

Now the workflow package zip is ready for Upload to ATOM.

# Developing Workflows - BPMN/DMN

## Modelling


Workflow can be used in multiple scenarios such as Config provisioning, Software Upgrade, Protocol migration, Closed Loop automation etc..

## Package Explorer

**Navigate to Administration -> Plugins & Extensions -> Package Explorer**

Under workspace, we can start BPMN and DMN Modelling by using (+) button.

Create a service package by selecting the type and clicking on create then it will generate folder structure automatically.

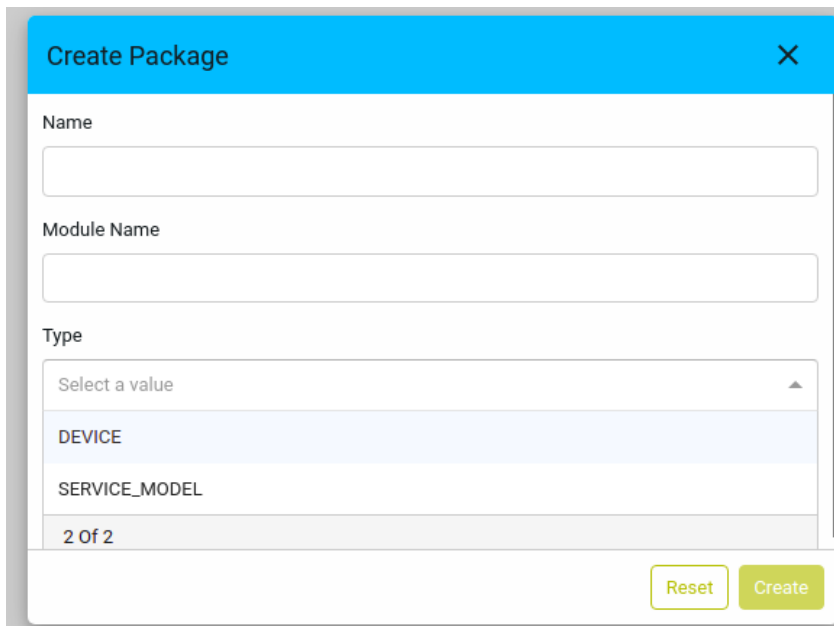

**Create Package** [X]

Name

Module Name


Type  
Select a value  
DEVICE  
SERVICE\_MODEL  
2 Of 2

Reset Create

The sample folder structure looks like below after creating a package



Select vendor folder then create BPMN/DMN files by selecting the type of workflow

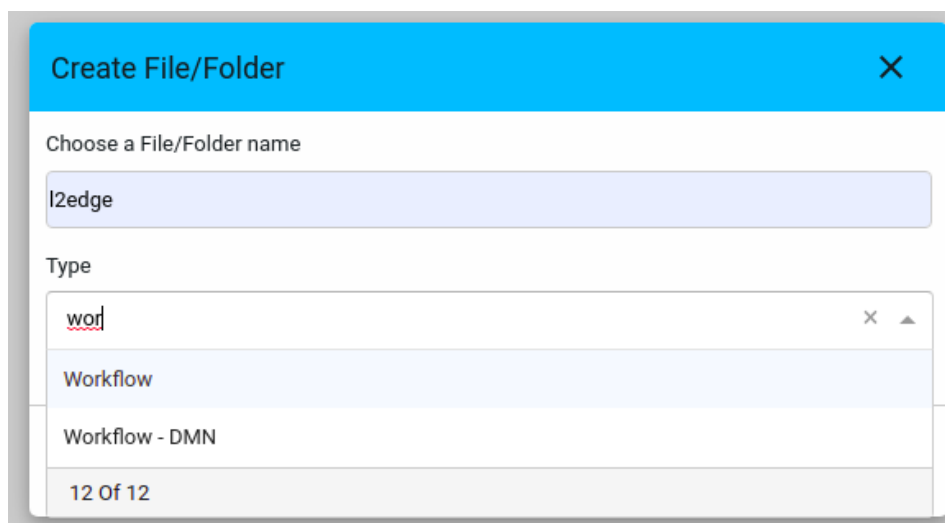




DMN call activity from BPMN select implementation type as DMN and reference to DMN file  
After filling 'Result Variable' then 'Map Decision Result' will appear in UI then based on user selection it will return output



## DMN Decision table

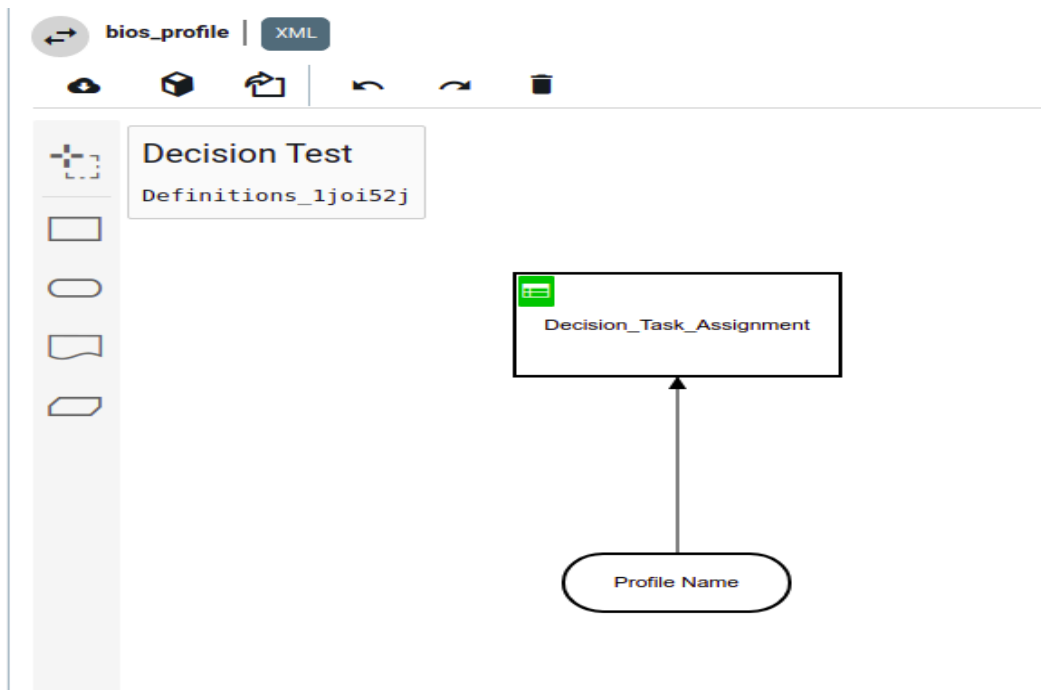


Decision\_Task\_Assignment

Decision\_Task\_Assignment

U	Input +	Output +			Annotation
	Profile Name	Power Button Function	Security Device Support	ENERGY_PERF_BIAS_CFG mode	
	string	string	string	string	
1	"altistar"	"4 Seconds Override"	"Disable"	"Maximum Performance"	Altistar Profile
2	"mavenir"	"4 Seconds Override"	"Disable"	"Maximum Performance"	Maveneir Profile
+	-				

## Deploy & Validate

We can deploy and validate the workflow which we developed via package & explorer  
And we can validate and see the xml view

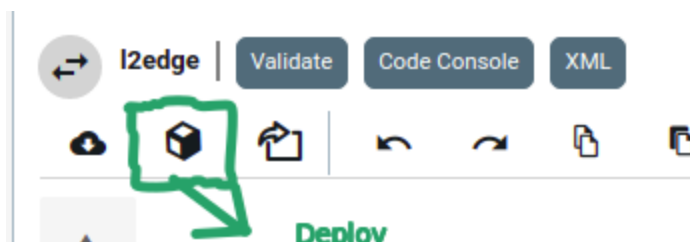

## Use Case 1 - Software Upgrade

Frequently organisations are confronted with the challenge of upgrading their network devices to the latest patch version. In Large scale Enterprise environments, we will be running a similar version across the network based on their role.

These situations are very critical in the lifecycle of a device, and need to execute them carefully with predefined MOP approved by Network Architects.

Typical Software Upgrade will involve the following basic constructs:

1. User Inputs to begin the change like Device, Image Version, Image Repo Details (FTP, SCP etc..), Software Image
2. Pre Checks - Set of pre checks before proceeding for the actual migration such as check current running software version, Hardware details, Config backup, Interface and Protocol level checks etc..
  - a. If any of the prechecks failed then raise a ticket and stop the migration activity for that device.
3. Copy the Image from Remote repository to the device (eg: Disk, NVRAM etc..) and set the boot options as required.
  - a. Raise an incident if the image copy fails for some reason.
4. Request Network Admin for device reboot and proceed on approval.
5. Check for devices reachability whichever way is feasible as specified below
  - a. Continuous Ping check within stipulated time. [ [Fig 1](#) ]
  - b. Listening for any asynchronous notifications like SNMP trap. [ [Fig 2](#) ]
6. Perform Post checks
  - a. Compare Pre and post check results & if the validation fails then call for a rollback of that device upgrade activity.

The above sequence of steps are readily understood by networking professionals. Now, let us see the thought process to translate that logic into ATOM Workflow. Not all the logic is explained here (A full explanation with diagrams will follow this table).

#	Use case Requirements	Relevant Concept in ATOM Workflow	Notes	Which Artifact in the package this goes into ?
1	<b>User Inputs</b> to begin the change like Device, Image Version, Image Repo Details (FTP, SCP etc..), Software Image	User Inputs are captured via 'User Tasks' in workflow.	User Task is a BPMN concept, hence it goes into the bpmn model.	bpmn
2	<b>Pre Checks</b> - Set of pre checks before proceeding for the actual migration such as <b>check current</b>	This involves fetching relevant data from devices. When fetching data two scenarios are possible in ATOM.	API invocation, extracting/using the response etc are	API call, sending the input, processing output all go into the bpmn

	<i>running software version, Hardware details, Config backup, Interface and Protocol level checks etc..</i>	<p>Maybe the information is already available in the ATOM database (this happens if device yang models are being used). Or, maybe you want to fetch it by running a command on the device. Either way, fetching is an ATOM api call. You would use the relevant api and interpret the response.</p> <p>Making an api call is done by using relevant “Delegate” class and filling in API inputs. At the same time, interpreting the API response may involve extracting from the xml/json result or parsing the command text.</p> <p>There may be utilities available to help with these programming tasks.</p>	<p>part of the bpmn model itself.</p> <p><a href="#">Different Delegate classes (aka the API) are explained here.</a></p>	
	a. If any of the prechecks failed then <b>raise a ticket</b> and stop the migration activity for that device.	Raising a ticket translates to calling an external service (Such as ServiceNow) via its API.	<a href="#">Refer to 3rd party integrations</a>	API call, sending the input, processing output all go into the bpmn
4	<p><b>Copy the Image from Remote</b> repository to the device (eg: Disk, NVRAM etc..) and set the boot options as required.</p> <p>a. Raise an incident if the image copy is fails for some reason</p>	<p>Most of the time business functions are made available as YANG rpcs. You can use ATOM UI developer tools to browse through available rpcs. The same list will also be available in the workflow designer.</p> <p>Calling an RPC is acheived by using ATOMRPCDelegate Class.</p>		
5	Request Network Admin for device reboot and proceed on <b>approval</b> .	Approval maps to a UserTask		

The following diagram depicts a fully expressed bpmn process for the above requirement.

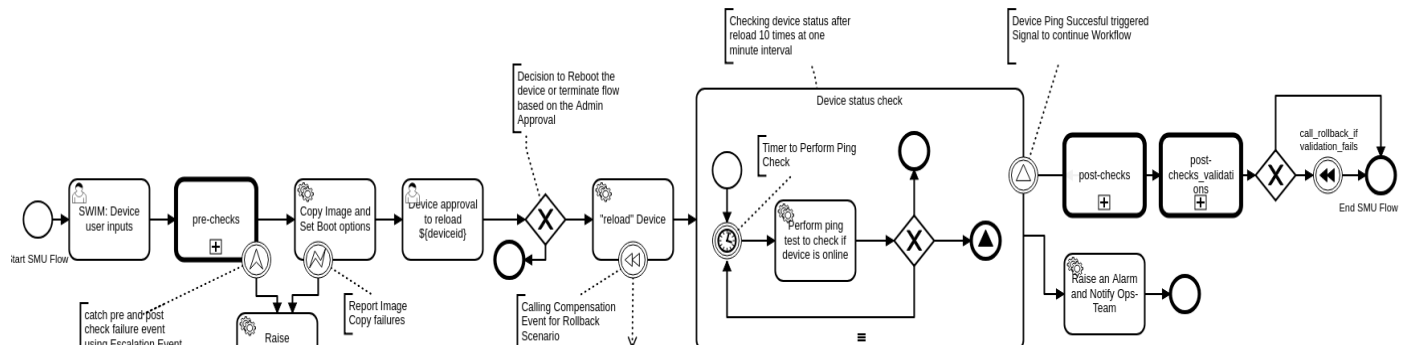


Figure 1 - BPMN Diagram for SMU with Ping check



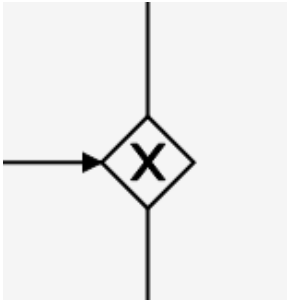




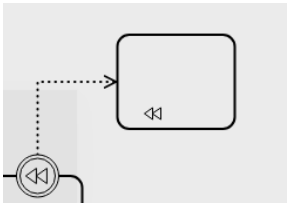


Figure 2 - BPMN Diagram for SMU with Async Notification

BPMN is a fairly large specification. But, the set of constructs we need on a regular basis are small. The following table explains some of the regularly used BPMN constructs.

Workflow Task/ Event type	Interaction/ Description	Task Name	Symbol
<a href="#">User Task</a>	User interacts with ATOM	SWIM: Device user inputs, Device approval to reload	
Service task	ATOM to Device Interaction (CLI/API)	Copy Image and Set Boot options,"reload" Device,Perform ping test to check if device is online	

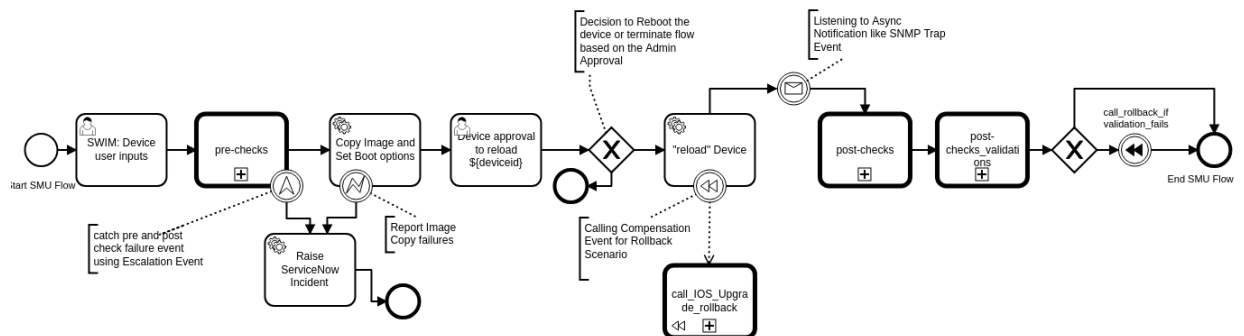Service task	ATOM to External API's	Raise an Alarm and Notify Ops-Team,Raise ServiceNow Incident	
<a href="#">Gateway/Decision box</a>	Control flow within the process	NA	
<a href="#">Timers</a>	Synchronous wait events within the process	NA	
<a href="#">SubProcess MultiInstance</a>	Similar to Looping construct in programming	Device status check	
Call Activity	Similar to DRY principle such as Function calls	pre-checks,post-checks,post-checks_validations	
Error Boundary Event	Raise an alarm or incident for any service task failures	NA	
Compensation Activity (Rollback on Failures)	Handle the task failures such as Config Rollback etc..	call_IOS_Upgrade_rollback	

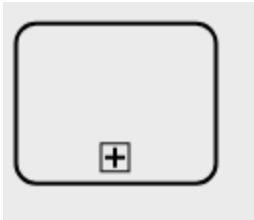Refer to the [Appendix](#) section for more details.


Python Reference	Workflow Construct
For loop	Multi-instance
For loop with range	Multi instance with loop cardinality
If condition	Conditional sequences
Sleep	Timer Duration
Throw and catch exception	Error Handling Event
continue	Non-interrupting Event
break	Interrupting Event
functions	Call activity
Modules	sub-process

## Use Case 2 - Config Provisioning

Provision the vlan on the user specified device.

So below are high level tasks to be performed in the workflow.

1. Get inputs from the user such as Device IP, Vlan Number, Vlan description.
2. Form the payload and configure the device

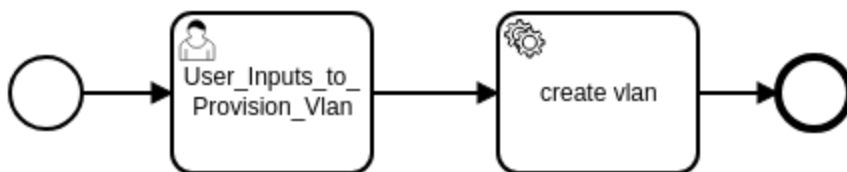

BPMN Diagram for Config Provisioning

### User Inputs Form

- First name the whole usecase appropriately like below, so this name can be seen in ATOM UI.

**General**

**Id** • ⓘ

Provision\_Vlan

**Name** •

Provision\_Vlan

**Version Tag**

11.1.0.0

☒ Executable

☒ Startable

**Element Documentation**

Provision Vlan based on User Input

- First action is to get inputs from the user, so let's name the task "User\_Inputs\_to\_Provision\_Vlan" and "Id" field will be auto-generated, but can be changed if needed.

**General** Form Input Parameters Output Parameters

**Id** • ⓘ

User\_Inputs\_to\_Provision\_Vlan

**Name** •

User\_Inputs\_to\_Provision\_Vlan

- To take the inputs from the user, Click on the "Forms" tab next to "General" and give input field names like below.

General
Form
Input Parameters
Output Parameters

Add FormField

Form Key

custom

Device to be configured with Vlan

string

Vlan to be Configured

string

Vlan-name

string

## Edit Form Field

### Form Field

ID

deviceid

Label

Device to be configured with Vlan

Type

string

Default Value

### Metadata Properties +

### Constraints +

These form inputs given by the user can be accessed anywhere in this workflow task.

## Service Task to configure the Device

- Form the payload with these inputs and send that as an output. So we create one “output parameter” with a name called “payload” and “Type” as “script” where script format is “groovy”. The payload formation is done as xml with user inputs. The last line in the script will be considered as output of this first workflow task and stored in the output parameter name “payload” in the above case.
- To perform the POST operation, create a service task and name it as “Create Vlan”

To provision the device with provided CLI commands use the following Java class:  
“com.anuta.atom.workflow.delegate.AtomRpcDelegate” as shown below.

The screenshot displays the 'General' tab of a workflow configuration interface. At the top, there are four tabs: 'General' (selected), 'Listeners', 'Input Parameters', and 'Output Parameters'. The 'Id' field contains 'Activity\_0nq29m2'. The 'Name' field contains 'create vlan' and is highlighted with a green border. The 'Implementation' dropdown menu is set to 'Java Class'. Below this, the 'Java Class' field contains the fully qualified class name 'com.anuta.atom.workflow.delegate.AtomRpcDelegate'. There are three toggle switches: 'Asynchronous After' (checked), 'Asynchronous Before' (unchecked), and 'Exclusive' (checked). At the bottom, there is an 'Element Documentation' text area which is currently empty. In the bottom right corner, there are two buttons: 'RPC' and 'Close'. A small icon with a double-headed arrow is located in the bottom left corner.

**General**   Listeners   Input Parameters   Output Parameters

**Id** •

Activity\_0nq29m2

**Name** •

create vlan

**Implementation**

Java Class

**Java Class** •

com.anuta.atom.workflow.delegate.AtomRpcDelegate

☒ Asynchronous After

☐ Asynchronous Before

☒ Exclusive

**Element Documentation**

RPC   Close

- Provide Input Parameters for the POST operation that includes atom\_url, atom\_action, atom\_payload and then the Output Parameter like below.

**ATOM\_INPUT:**

General
Input Parameters
Output Parameters

Add Input

atom\_url

/workflowlib:execute-command

atom\_action

POST

atom\_payload

script type : groovy

```

1 def deviceid = execution.getVariable("deviceid");
2 def vlan-id = execution.getVariable("vlan-id");
3 def vlan-name = execution.getVariable("vlan-name");
4
5 def cmd = ""
6 vlan ${vlan-id}
7 name ${vlan-name}
8 ""
9
10 "<input><device-id>" + deviceid + "</device-id><command>" + cmd + "</command><splitter>\n</splitter></input>";

```

**ATOM\_OUTPUT:**

General
Input Parameters
Output Parameters

Add Output

vlanoutput

script type : groovy

```


1 def vlanoutput = execution.getVariable("atom_rpc_output");
2 vlanouput;

```

- Place this developed workflow bpmn file in the vendor/workflow folder of the package structure generated initially in section [Creating workflow package using ATOM SDK](#)

**Use Case 3 - L3 Service Provisioning**



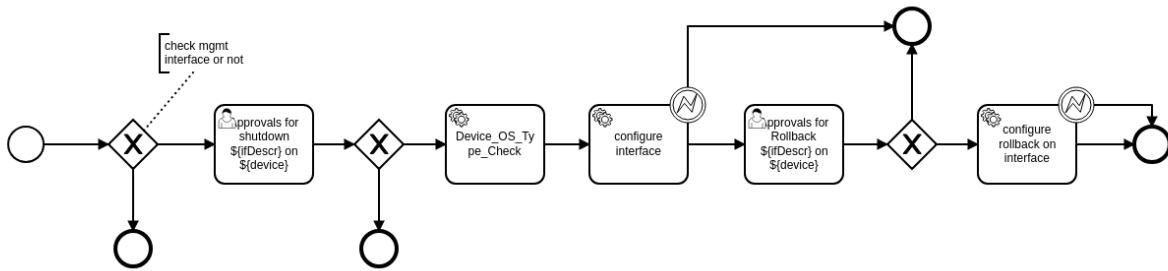

First Step to create the workflow would be to break the use-case into small portions:

- Check if the flapping interface is the management interface of the device. If yes, then terminate the workflow without any action.
- Take an approval from the Network Admin to shutdown the interface.
- Once the Approval is received, check the device os type so that we generate corresponding payload to be pushed to the device.
- Shutdown the interface
- We can then wait for the Network Admin approval to unshut the interface after they troubleshoot the issue.
- Once approved we rollback the shut commands and terminate the flow.

This same flow can be augmented with various steps like :

- Opening a Ticket in the ITSM tool and getting approvals on the ITSM tool. [Refer API Integration]
- Performing certain pre or post checks.[ Troubleshooting logs can be collected and appending these logs to ITSM tool.]
- Adding Error Handling for all the tasks and covering negative scenarios.
- Config retrievals and Correlation for alert enrichment and impact analysis.

Before we begin building the workflow, ATOM sends all the relevant alert details [severity,device\_id,ifDescr,acknowledged/resolved status,alertname,message,entity affected,alert record id] as seed data whenever the workflow is triggered.These can be used as process variables in the workflow and need not be user inputs.

**Step-1:** Check if the flapping interface is the management interface of the device. If yes, then terminate the workflow without any action. We use a Decision gateway from our palette and check if the interface name is among the standard management interfaces for devices.



General

Listeners

Input Parameters

Output Parameters

Form

Add FormField

Form Key

custom

Form Builder Data

Display form builder forms

approval\_to\_shut\_interface

value can be true(interactive) or false(for non interactive)

boolean

### Edit Form Field

Form Field

ID

approval\_to\_shut\_interface

Label

value can be true(interactive) or false(for non interactive)

Type

boolean

Default Value


Metadata Properties


Constraints

Reset

Update


**Step-3:** Once the Approval is received, check the device os type so that we generate corresponding payload to be pushed to the device. For this step we use the already parsed basic inventory content of the device stored in our yang engine via a restconf Operation.Details about the java class and required params can be found in the appendix.Refer below screenshots for any queries.

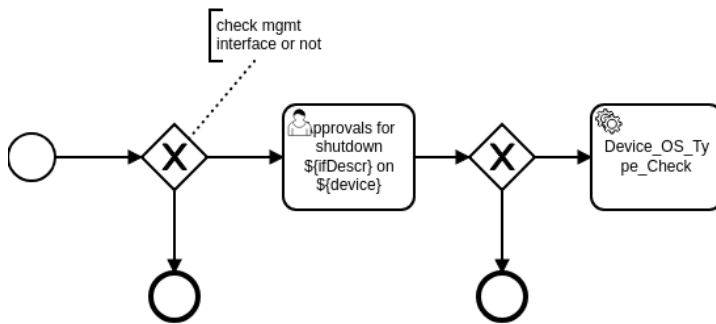

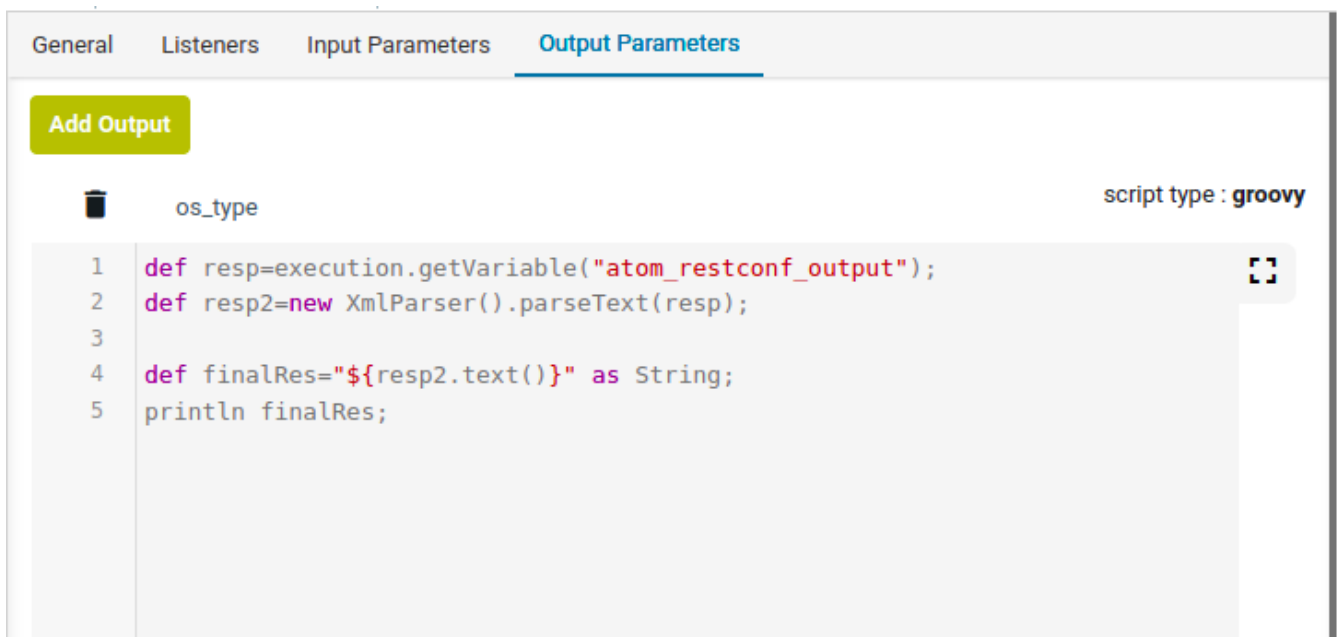


General Listeners Input Parameters **Output Parameters**

**Add Output**



 **os\_type** script type : **groovy**

```
1 def resp=execution.getVariable("atom_restconf_output");
2 def resp2=new XmlParser().parseText(resp);
3
4 def finalRes="${resp2.text()}" as String;
5 println finalRes;
```

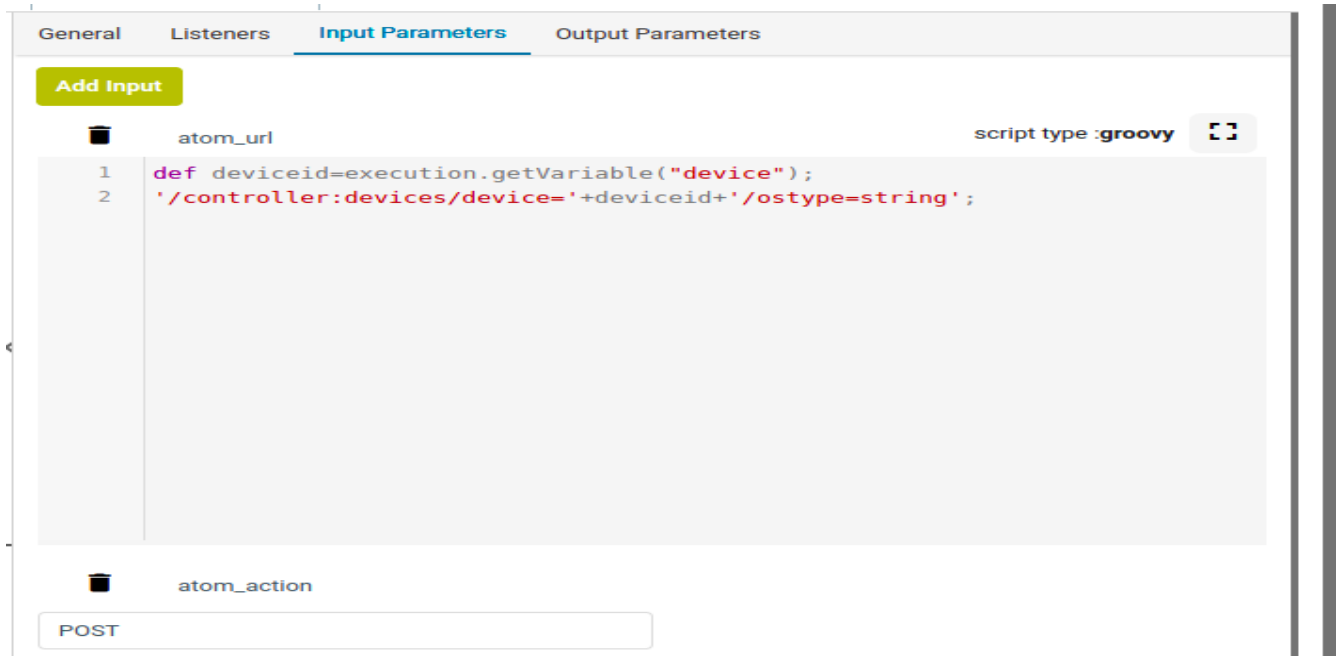


General Listeners **Input Parameters** Output Parameters

**Add Input**

 **atom\_url** script type : **groovy** 

```
1 def deviceid=execution.getVariable("device");
2 '/controller:devices/device='+deviceid+'/ostype=string';
```

 **atom\_action**

POST

**Step-4:** Shutdown the interface. For this step we use the existing credentials in the atom database , login to the device via any transport [SSH/API] and execute the desired action. We use a custom RPC which is available out of the box [workflow\_utils:execute-command] for implementing this step.Note that the same RPC can be used for executing any commands on the device.[Pre post checks show /configuration commands]. XML parsing can be done via groovy script as shown below.

General
Listeners
**Input Parameters**
Output Parameters

Add Input

atom\_action

POST

atom\_payload
script type :groovy

```

1 def deviceid=execution.getVariable("device");
2 def interface_name=execution.getVariable("ifDescr");
3 def os_type=execution.getVariable("os_type");
4
5 def cmds="";
6 if(os_type=="IOS" || os_type=="IOSXE" || os_type=="IOSXR" ||
  os_type=="NXOS"){
7     cmds="interface "+interface_name+"!-!\nshutdown!-!\n";
8 }
9 else if(os_type=="JUNOS"){
10     cmds="interface "+interface_name+"disable!-!\n";
11 }
12
13 "<input><device-id>"+deviceid+"</device-id><command>"+cmds+"</command>
  </input>";

```

**Step 5 & 6 :** We can then wait for the Network Admin approval to unshut the interface after they troubleshoot the issue. Once approved we rollback the shut commands and terminate the flow. These steps are similar to approval and shutting down in implementation and can be copy pasted and edited wherever necessary.

Place this developed workflow bpmn file in the vendor/workflow folder of the package structure generated initially in section [Creating workflow package using ATOM SDK](#)

# Deploying & Operating on Workflows

Please refer to **ATOM User/Admin Guide** for details on Uploading, Deploying and Inspecting Workflows.

## Swagger/OpenAPI Integration

ATOM Open API integrations help easily build Integrations to Any IT System or Network Technology. Atom utilizes RPC's to communicate via APIs with southbound systems in your network. The RPC's are the implementation of controllers, orchestrators, and REST interfaces that trigger specific actions in the platform, thereby keeping integrations(RPC's) separate from the business logic(Atom workflow).

Atom allows you to extend your applications and support integrations with any entity from within the workflow. These RPC catalog items in the workflow helps to optimize end-to-end IT processes with Multi-vendor and multi-domain support, execute zero-touch automation, and streamline operational processes.

### Procedure to create External RPC

1. Navigate to Administration -> Plugins & Extensions → External Rest Services
2. Create service

Create Service

Entities

Service

- mandatory information

Name

openapi\_jira

Description

description

Owner

system

Shared-With

system

### 3. Create swagger

- Select the created service then navigate to entities and click on swagger
- Provide below details
  - API-Source (api-url/file)
  - If 'api-url' then provide api-url link to fetch APIs  
Ex - <https://developer.atlassian.com/cloud/jira/platform/swagger.v3.json>
  - If 'file' then upload zip file(JSON file)

atom

Plugins & Extensions

External Rest Services

external-rest-services:external-rest-services Informat...

Details

Entities


Enter a keyword...

Swagger

Unprovisioned Configuration

Webhooks

Name	Description	Owner	Shared With	Created-On
openapi_jira		system	system	2021-08-31 10:40:16.305

**Create Swagger** 

### Entities

Swagger

• -mandatory information

**Title**

**Api-Url**

The location of the swagger/openapi config. This will be used to import the config.

**Api-Source**

**Terms-Of-Service**


**License-Name**


**License-Url**

**Owner** •

**Shared-With**

4. Discover APIs for rest service
  - a. Select the created service then navigate to entities and click on swagger.
  - b. Select on three dotted lines and click on discover-apis RPC
  - c. After discover then we found below containers under discovered-data
    - i. APIs
    - ii. Paths
    - iii. Security
    - iv. Servers
    - v. tags

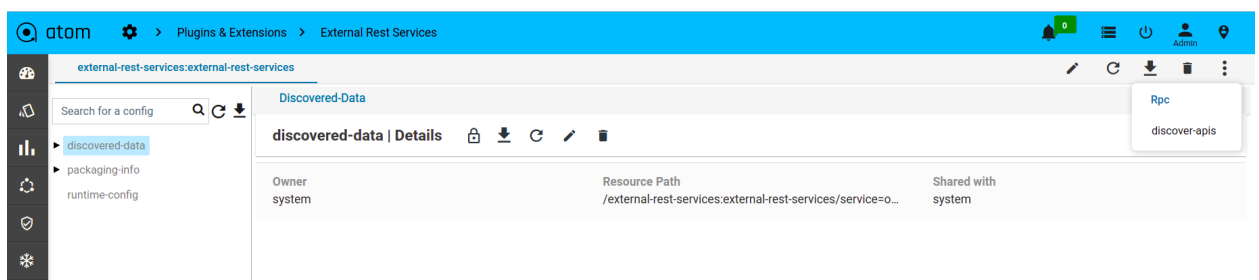

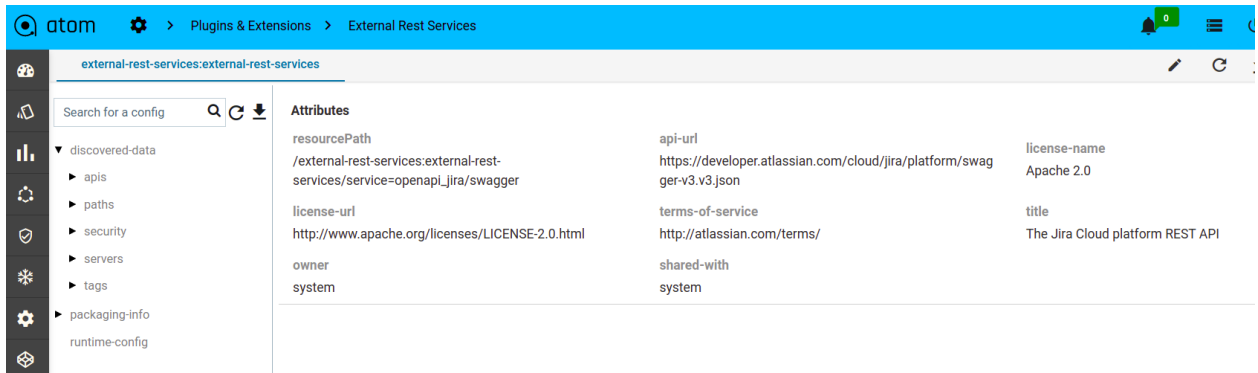

## 5. Generate package for rest service

- Select packaging-info container then click on generate package RPC
- It generates a zip file and stores it in the grid.
- If not provided any package-info details then automatically took service name as module name and the default version is 1.0.0
- If the user wants to provide module name and version then follow like below

Create Service

Entities

Service

Swagger

Packaging-Info

-mandatory information

Package-Name

Swagger APIs

Package-Version

2.0.0.0

Module-Name

openAPI\_jira



Description

description

Owner


system

Shared-With

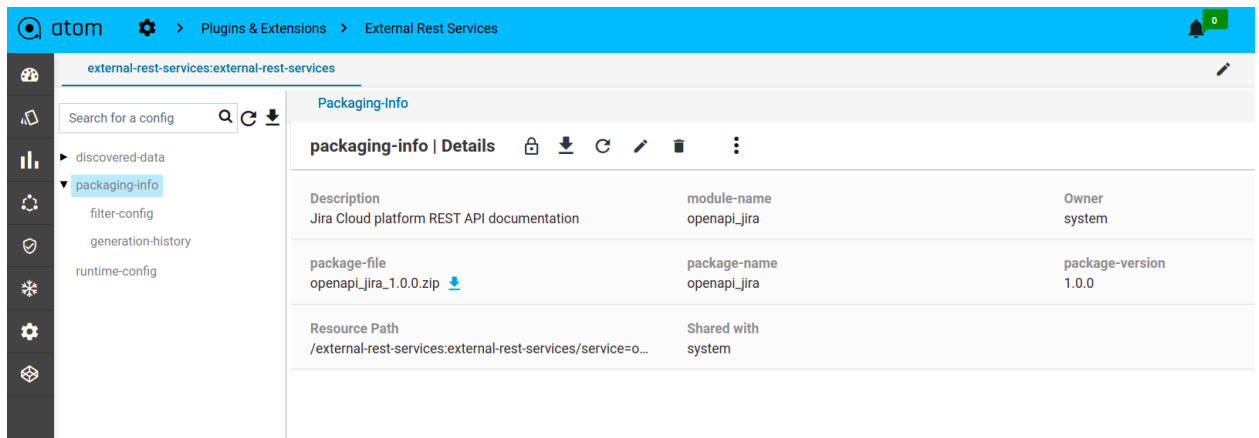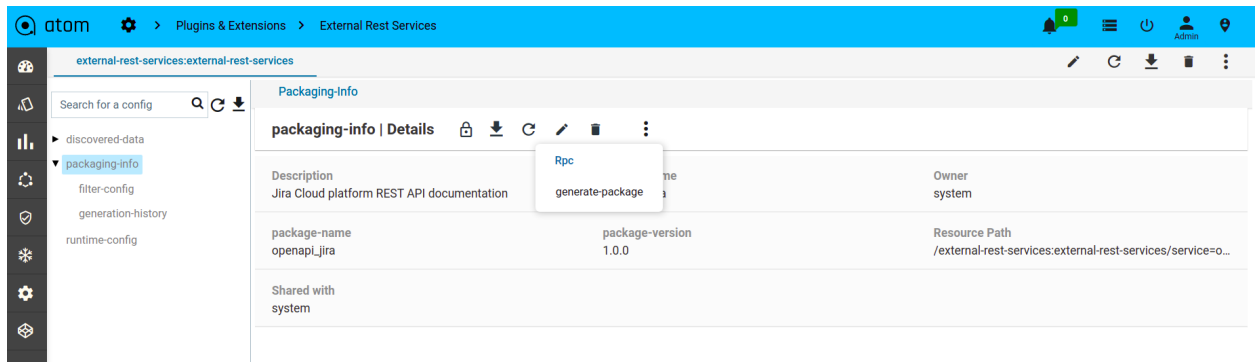


## 6. Upload package

- Select packaging-info container then select generated-package and execute upload-package RPC
- It uploads the package into ATOM then should activate the package

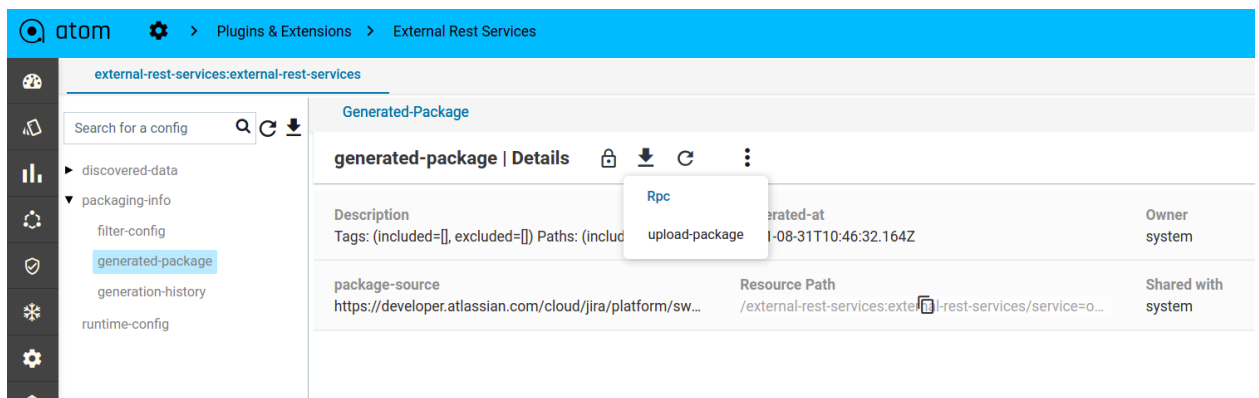


## 7. Add Server

- Provide server details under discovered-data → Server

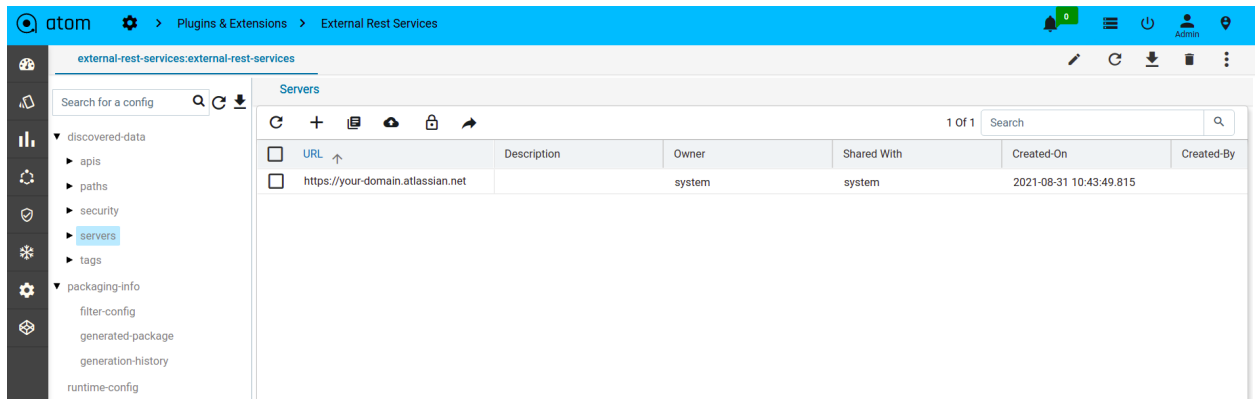

8. Runtime configuration
  - a. Provide preferred server
  - b. Runtime-config includes
    - i. Headers
    - ii. Parameters
    - iii. Security-parameters

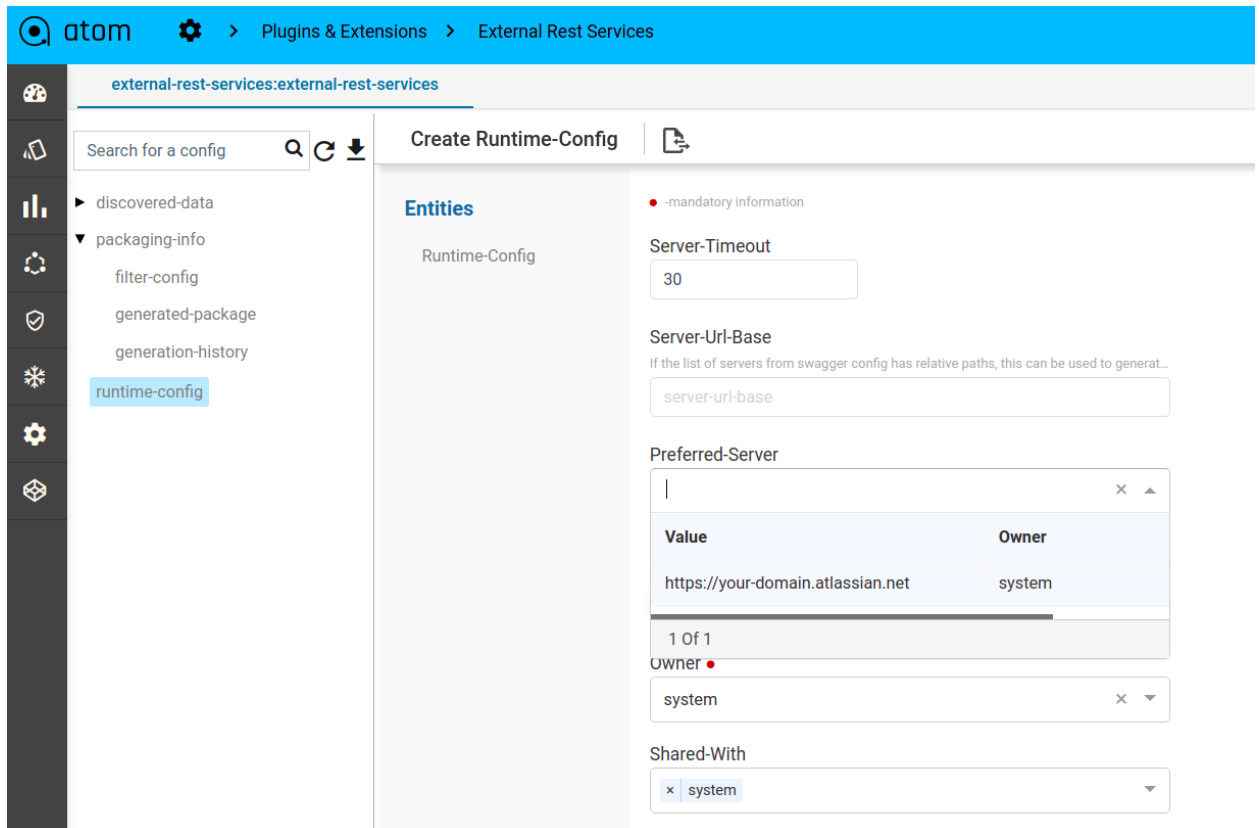

external-rest-services:external-rest-services

Search for a config 🔍 ↻ ⬇

- ▶ discovered-data
- ▼ packaging-info
  - filter-config
  - generated-package
  - generation-history
- ▼ runtime-config
  - headers
  - parameters
  - security-parameters**

Create Security-Parameters 📄

**Entities**

Security-Parameters

• -mandatory information


Basic-Auth-Username  
anutaapi


Basic-Auth-Password  
..... 🔍

Owner •  
system × ▼

Shared-With  
x system ▼

- Finally observe all the RPCs in the workflow catalog and use it in the usecase requirement.

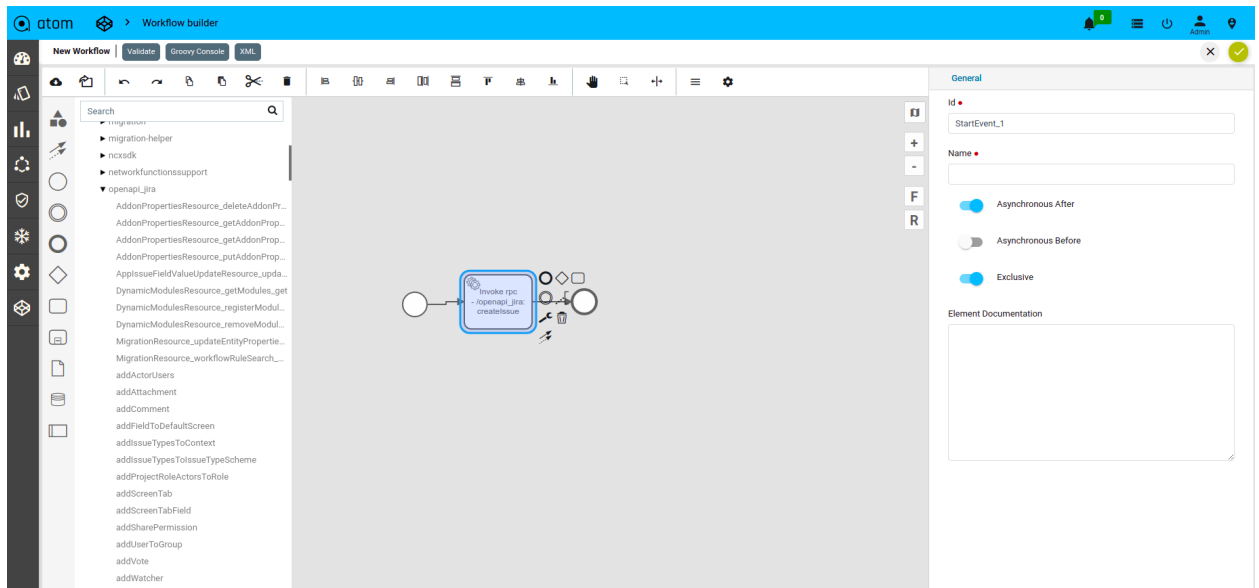

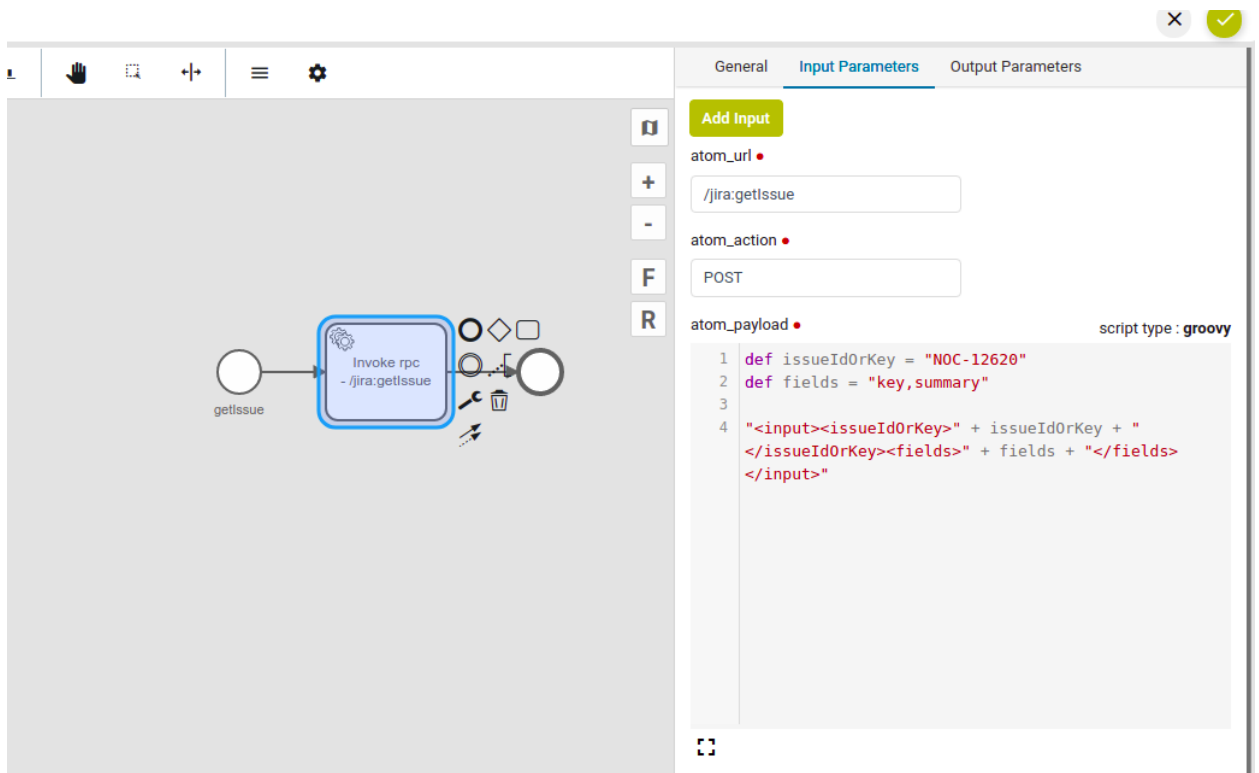


The screenshot shows the ATOM workflow editor. On the left, a workflow diagram shows a start node labeled 'getissue' connected to an 'Invoke rpc' step, which is configured with the URL '/jira:getIssue'. On the right, the 'Input Parameters' tab is active, showing three input parameters: 'atom\_url' with value '/jira:getIssue', 'atom\_action' with value 'POST', and 'atom\_payload' with a Groovy script. The script is as follows:

```

1 def issueIdOrKey = "NOC-12620"
2 def fields = "key,summary"
3
4 "<input><issueIdOrKey>" + issueIdOrKey + "
  </issueIdOrKey><fields>" + fields + "</fields>
  </input>"
  
```

The script type is set to 'groovy'.

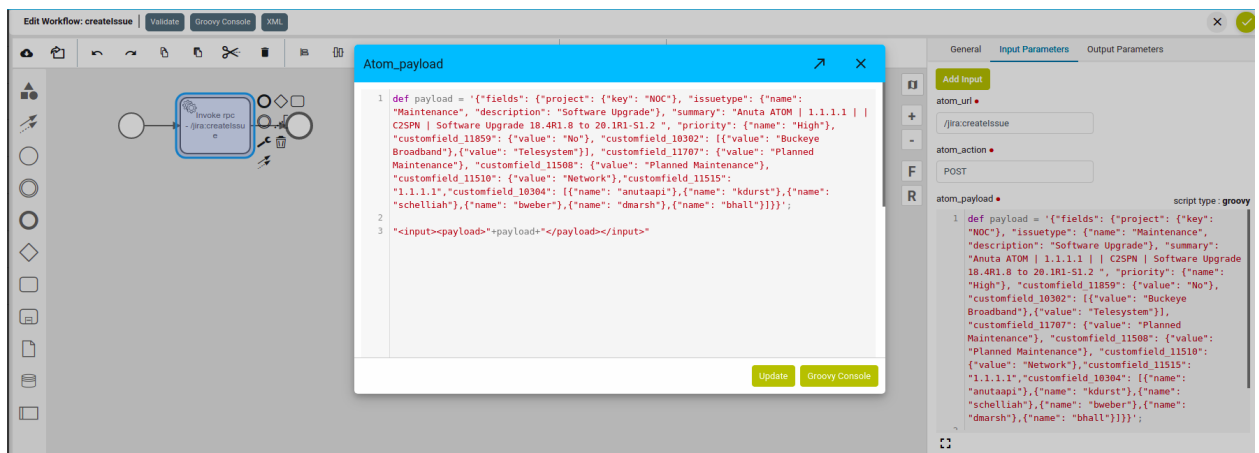

This screenshot shows the 'createIssue' workflow in the ATOM editor. The workflow diagram on the left shows an 'Invoke rpc' step configured with the URL '/jira:createIssue'. The 'Input Parameters' tab on the right shows three input parameters: 'atom\_url' with value '/jira:createIssue', 'atom\_action' with value 'POST', and 'atom\_payload' with a Groovy script. A detailed view of the 'atom\_payload' parameter is shown in a pop-up window, displaying the following Groovy script:

```

1 def payload = '{"fields": {"project": {"key": "NOC"}, "issuetype": {"name": "Maintenance"}, "description": "Software Upgrade"}, "summary": "Anuta ATOM | 1.1.1.1 | C2SPM | Software Upgrade 18.4R1.8 to 20.1R1-S1.2 ", "priority": {"name": "High"}, "customfield_11859": {"value": "No"}, "customfield_10302": [{"value": "Buckeye Broadband"}, {"value": "Telesystem"}], "customfield_11707": {"value": "Planned Maintenance"}, "customfield_11508": {"value": "Planned Maintenance"}, "customfield_11510": {"value": "Network"}, "customfield_11515": "1.1.1.1", "customfield_10304": [{"name": "anutaapi"}, {"name": "kdurst"}, {"name": "schelliah"}, {"name": "bweber"}, {"name": "dmarsh"}, {"name": "bhall"}]}}';
2
3 "<input><payload>" + payload + "</payload></input>"
  
```

The script type is set to 'groovy'.

# Appendix

## ATOM Workflow FAQs & Examples

Below we cover many FAQs and Examples of workflow for quick understanding of support and usage.

## ATOM Workflow Activities

### Timer

Timer can be configured in any of the following ways,

- 1) Time Date
- 2) Time Duration
- 3) Time Cycle

All the configurations are based on [ISO 8601](#)

We can use the following symbol and configuration in the properties panel.



#### 1. Date

If we want to add wait between the tasks for a fixed time and date or start workflow after a fixed time and date, then date can be used. The configuration would look like below, where we can specify how long the timer should run before it is fired. In the example below, the timer will run till 1st July 2019, 12:13:14 UTC timezone, after which it is fired & the next task is triggered.

**General** Listeners Input Parameters Output Parameters

**Id** •  
Event\_1aljqvq9

**Name** •

**Timer Definition Type**  

CYCLE DATE DURATION

**Timer Definition** •  
2019-07-01T12:13:14Z

☐ Asynchronous After

☐ Asynchronous Before

☒ Exclusive

## 2. Time Duration

If we want to add wait time between the tasks for a fixed time or start workflow after a fixed time, then duration can be used. The configuration would look like below, where we can specify how long the timer should run before it is fired. In the example below, the timer will run till 5 minutes, after which it is fired & the next task is triggered.

**General** Listeners Input Parameters Output Parameters


**Id** •  
Event\_1aljqvq9

**Name** •

**Timer Definition Type**  

CYCLE DATE DURATION


**Timer Definition** •  
PT5M

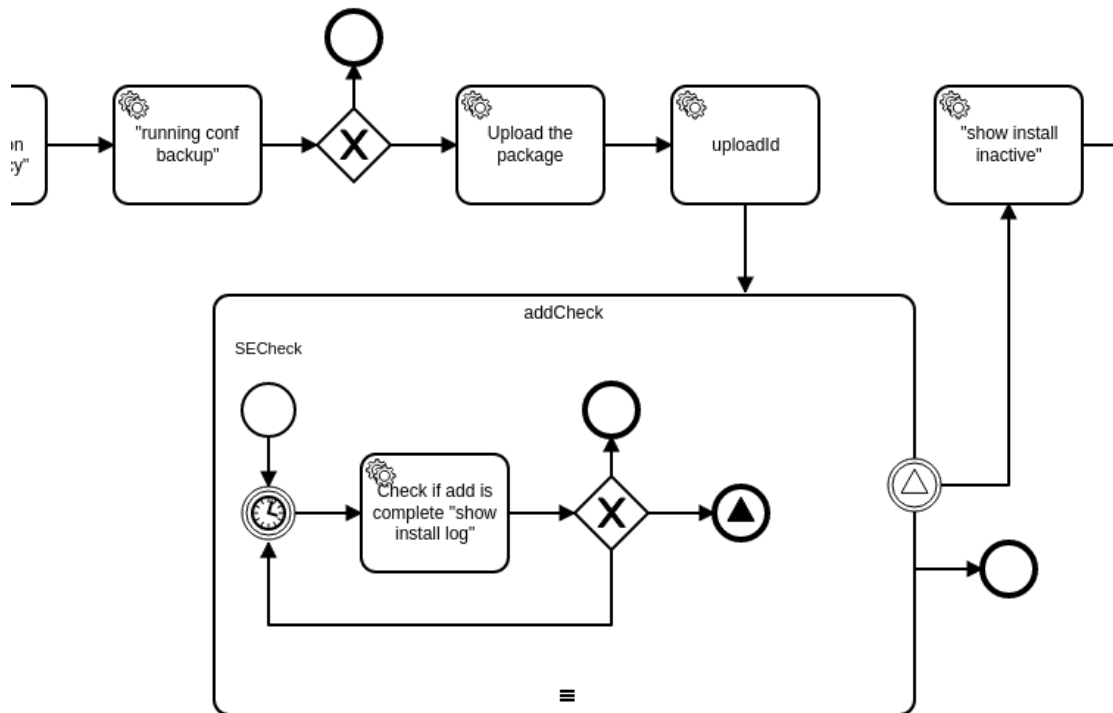

### 3. Time Cycle

If we want to start a workflow periodically, then a cycle can be used. The configuration would look like below, where we can specify repeating intervals. In the example below, workflow will run every day starting from 29th July 2019, 04:10 PM IST timezone, without any end since R does not have any value.

General	Listeners	Input Parameters	Output Parameters
<p><b>Id</b> •</p> <input type="text" value="Event_1aljqv9"/>			
<p><b>Name</b> •</p> <input type="text"/>			
<p><b>Timer Definition Type</b></p> <div> <span>CYCLE</span> <span>DATE</span> <span>DURATION</span> </div>			
<p><b>Timer Definition</b> •</p> <input type="text" value="R/2019-07-29T16:10+05:30/P1D"/>			

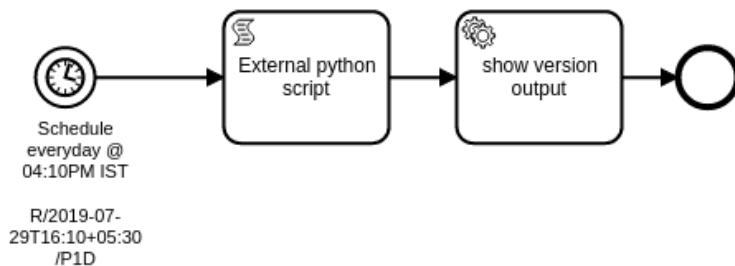


## Sub-process


In ATOM Workflow Modeler we can include a bpmn file which can be treated as a generic library into another bpmn file.

For example:

There is a bpmn file which will add a vlan or delete vlan. It can be added into a complex workflow where we have a vlan addition requirement serving as a reusability.

In the below example “**DeleteSnmpConfiguration**” is a subprocess which is a bpmn file where icon representation will be as follows.



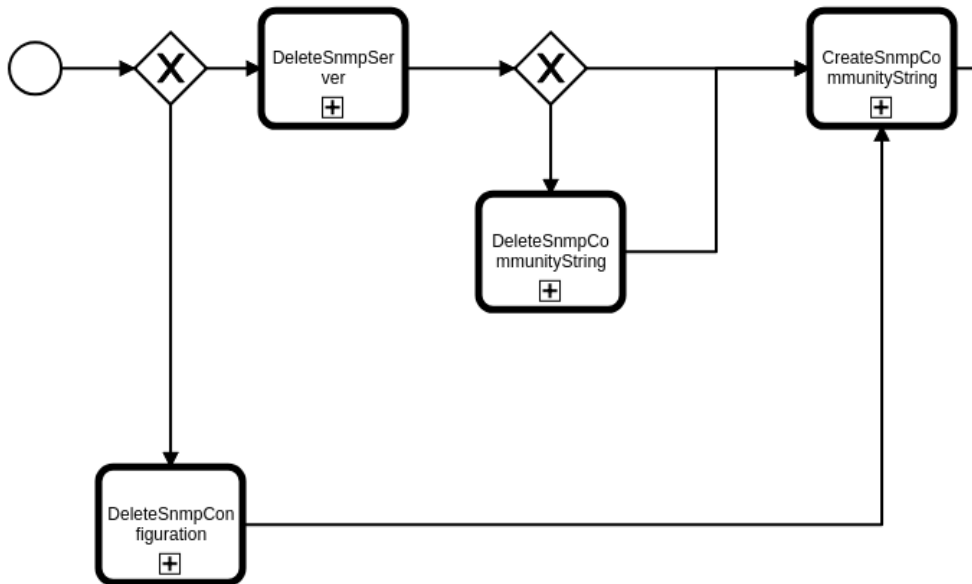

### How we map other bpmn file:


In the properties panel, we have to select bpmn file name from dropdown list as input for field “Called Element”.

General	Listeners	Input Parameters	Output Parameters	Variables
<p><b>Id</b> •</p> <input type="text" value="deletesnmpconfiguration"/>				
<p><b>Name</b> •</p> <input type="text" value="DeleteSnmpConfiguration"/>				
<p><b>Called Element</b></p> <input type="text" value="deleteconfiguration"/>				
<p><input type="checkbox"/> Business Key</p>				
<p><input checked="" type="checkbox"/> Asynchronous After</p>				
<p><input type="checkbox"/> Asynchronous Before</p>				
<p><input checked="" type="checkbox"/> Exclusive</p>				
<p><b>Element Documentation</b></p> <input type="text"/>				

## Signal End Event & Boundary Event

Below we consider an example where Signal End Event & Boundary Events are used.

**Example:**

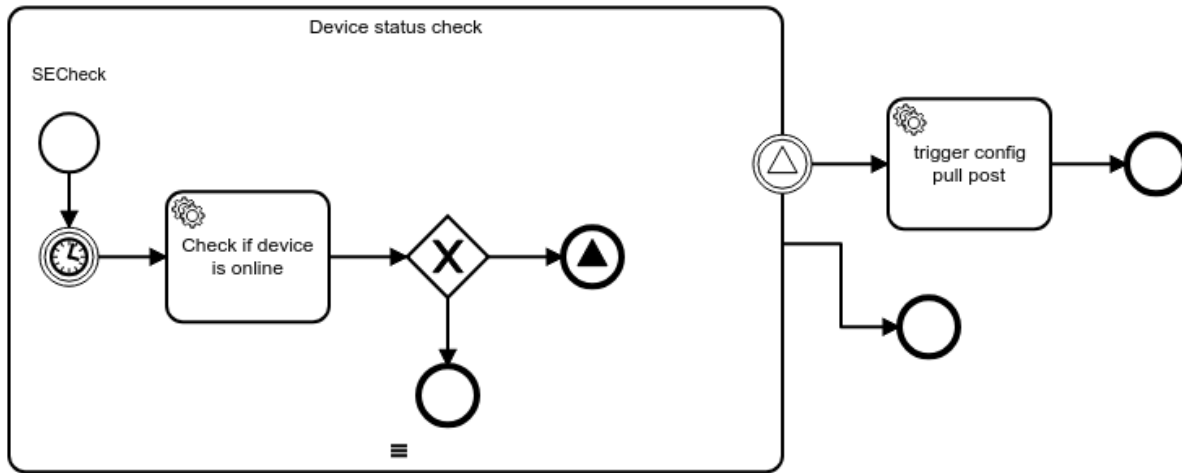

Here we are checking 'Device Inventory' of the device in a loop after device reboot operation.

- 1) If the 'Device Inventory' is successful either in one or two or more(up to 10) iterations, then it will exit from the signal end event.
- 2) To execute another step first it will verify the signal boundary event. If both matches then it will redirect to the next step else it will stop subprocess.

---

**General** | Listeners | Input Parameters | Output Parameters

**Id** •

**Name** •

**Loop Cardinality**

**Collection**

**Element Variable**

**Completion Condition**

☐ **Multi Instance Asynchronous After**

☐ **Multi Instance Asynchronous Before**

☒ **Multi Instance Exclusive**

A signal end event can be used to end a process instance using a named signal.

When deploying a process definition with one or more signal end events, the following considerations apply:


The name of the signal end event must be unique across a given process definition, i.e., a process definition must not have multiple signal end events with the same name. So first we need to get the current process id and append to the signal end event name then it will be unique.

The screenshot shows the 'Output Parameters' tab in the ATOM workflow editor. It contains two output parameters:

- get\_current\_process**: script type : **groovy**  
1 `def currentprocessid=execution.getProcessInstanceId();`  
2 `execution.setVariable("currentprocessid",currentprocessid);`
- inventoryStatus**: script type : **groovy**

Same way we need to apply Boundary events also.

**Signal End Event** Symbol and definition in above example



General
Listeners
Input Parameters
Variables

Id •

Event\_1tolch9

Name •

Signal+

UpgradeCheck\_\${currentprocessid} (id=Signal\_VuRTw) × ▾

Signal Name •

UpgradeCheck\_\${currentprocessid}


☐ Asynchronous After

☐ Asynchronous Before

☒ Exclusive

Element Documentation


**Signal Boundary Event** symbol and definition in above example

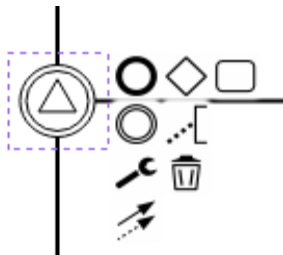

General	Listeners	Input Parameters	Output Parameters
<b>Id</b> ● <input type="text" value="BoundaryEvent_0fas6ip"/>			
<b>Name</b> ● <input type="text"/>			
<b>Signal+</b> <input type="text" value="UpgradeCheck_\${currentprocessid} (id=Signal_TpJOz)"/>			
<b>Signal Name</b> ● <input type="text" value="UpgradeCheck_\${currentprocessid}"/>			
<input type="checkbox"/> Asynchronous After <input type="checkbox"/> Asynchronous Before <input checked="" type="checkbox"/> Exclusive			
<b>Element Documentation</b> <input type="text"/>			

## Decision box


The following symbol represents the decision making based on the conditional statements :



The conditions will be specified on the connectors from the decision box

**For example:**

If we want to check whether the “payload” variable from User Inputs is not empty and take decision accordingly like below

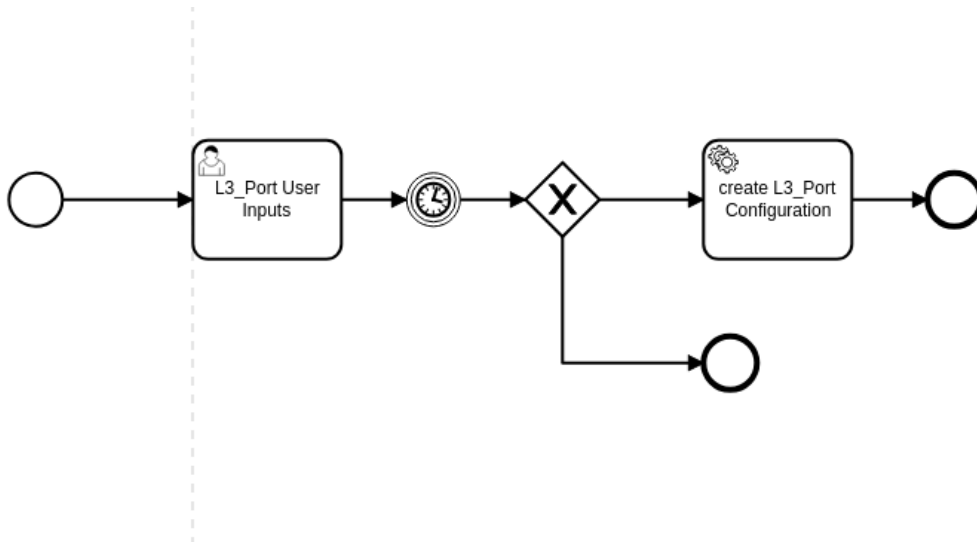

We will write condition on the connectors using condition-type as “expression” for both connectors with respective conditions.

#### True case:

Condition Type		
NONE	EXPRESSION	SCRIPT

Expression •


`${payload != None}`

#### False case:


Condition Type		
NONE	EXPRESSION	SCRIPT

Expression •

`${payload == None}`

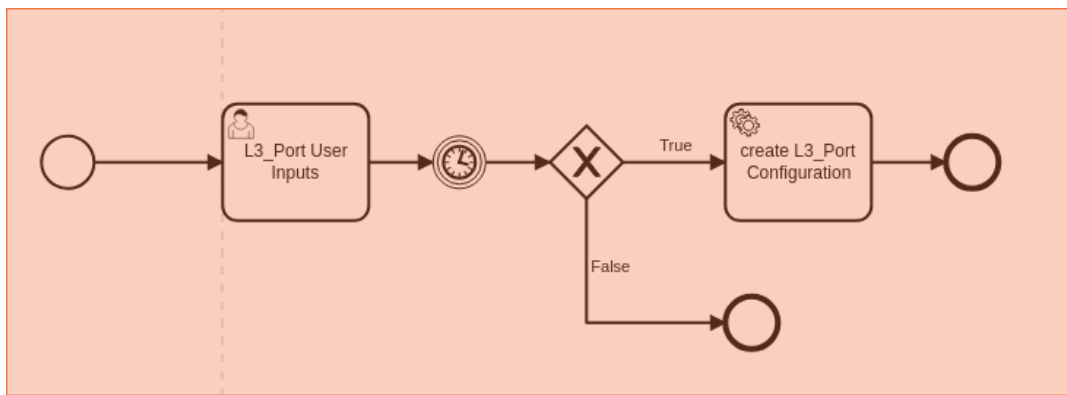

If “payload” is not “None”, control will direct to “Create L3\_port Configuration” task otherwise control will exit to the following exit symbol given.



## Multi-instance parallel execution

Create a new task and then change type to ‘Call Activity’ and select ‘Parallel Multi Instance’ after that do call activity for any BPMN file.

The activity with the plus sign is called a collapsed subprocess.

The plus(+) sign suggests that you could click on it and make the subprocess expand.

The Parallel(|||) sign acts as multi-instance execution parallelly and each instance stored in a separate process ids in the ATOM workflow instance.


Append the current process id wherever we are using signal end and boundary events.

If we run call activity with parallel then every subprocess is a unique automatically

Parent Process



## Sub Process

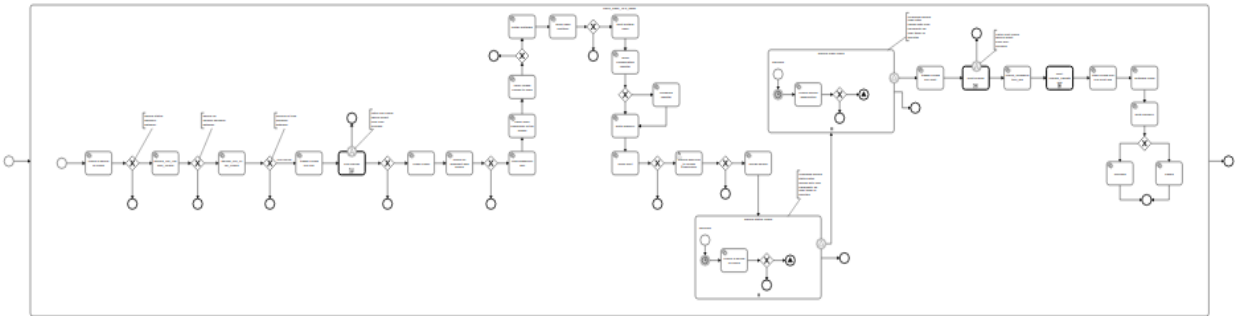

Refer below snapshot for multi-instance settings.

General
Listeners
Input Parameters
Output Parameters
Variables

Id

Activity\_1vmisga

Name

SWIM\_Cisco\_3850\_16.x

Called Element

SWIM\_Cisco\_3850\_16.x\_swim

Business Key

Loop Cardinality

Collection

deviceidList

Element Variable

deviceid

Completion Condition

Multi Instance Asynchronous After

Multi Instance Asynchronous Before

Multi Instance Exclusive

Asynchronous After

Asynchronous Before

Exclusive

Element Documentation

## New user input to existing inputs

1. Select “Create Task” and change type as “User Input”.
2. Click on “User Input” task.
3. In the “properties panel” on the right, click on the tab called “forms”.
4. Add new input from the user by clicking on the “+” sign in the form.
5. “Form Key” should always be selected as custom.
6. Provide the user input name you want in the ‘ID’ field, which will be displayed on ATOM UI.
7. Select the “Type” for the user input from the dropdown.
8. Provide the field description you want in the ‘Label’ field, which will be displayed on the ATOM UI.
9. Provide the default value if any.

**UserTask\_1mswi2k**

General Forms Listeners Input/Output Extensions

**Forms**

**Form Key**  
custom

**Form Fields**

- static\_route\_dest\_ip\_address
- static\_route\_dest\_community
- static\_route\_next\_hop\_ip
- ae\_interface\_name\_\_unit\_number\_\_description\_\_mtu
- ae\_interface\_ipv4\_address
- ae\_interface\_ipv6\_address
- Member\_1\_Name\_\_description
- Member\_2\_Name\_\_description
- deviceid
- New\_user\_input**

**Form Field**

**ID**  
New\_user\_input

**Type**  
string

**Label**  
New\_user\_input

**Default Value**

10. This input value given for “ID” parameter can be referred/used all through the workflow in Groovy/Javascript coding like following example snippet:

**Groovy:**

```
def nhips =
execution.getVariable("ae_interface_name___unit_number___description___mtu");
```

**Javascript:**

```
var operation = execution.getVariable("community-string-to-be-deleted");
```

**Add new XML tag to the existing payload**

To add a new tag to the payload, we need to add the respective xml payload to the existing payload in the task “User Inputs” .

**Example:**

```
<vlans>
  <vlan>
    <name>VXLAN-1005</name>
    <vlan-id>1005</vlan-id>
    <vxlan>
      <vni>1005</vni>
      <ingress-node-replication/>
    </vxlan>
  </vlan>
</vlans>
```

Here vlan-id can be input from the user .We will add user input field as explained in “[Adding a new user input:](#)”

**Note:** When we are adding a new tag in payload, it should be supported in device models.

In the “input/output” section of “User Input” task, get the data from the input variable given by user and add it in the xml like follow:


**Getting value:**

```
def userVlan = execution.getVariable("vlan-id");
```

**Form payload:**


```
<vlans>
  <vlan>
    <name>' +userVlan+ '</name>
    <vlan-id>' + userVlan+ '</vlan-id>
    <vxlan>
      <vni>' + userVlan+ '</vni>
      <ingress-node-replication/>
    </vxlan>
  </vlan>
</vlans>
```

Now include the above modified payload and the code in the output parameter section in the Input/Output tab of “User Inputs”.

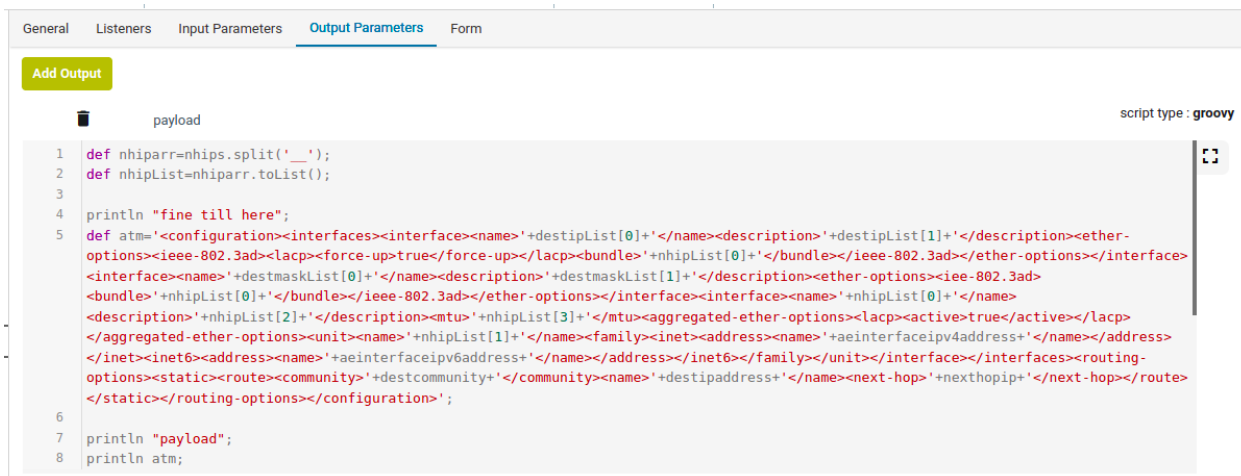

## Restconf & RPC call to ATOM

Any Restconf call to ATOM from Workflow is done by using the java class “com.anuta.atom.workflow.delegate.AtomRestconfDelegate”

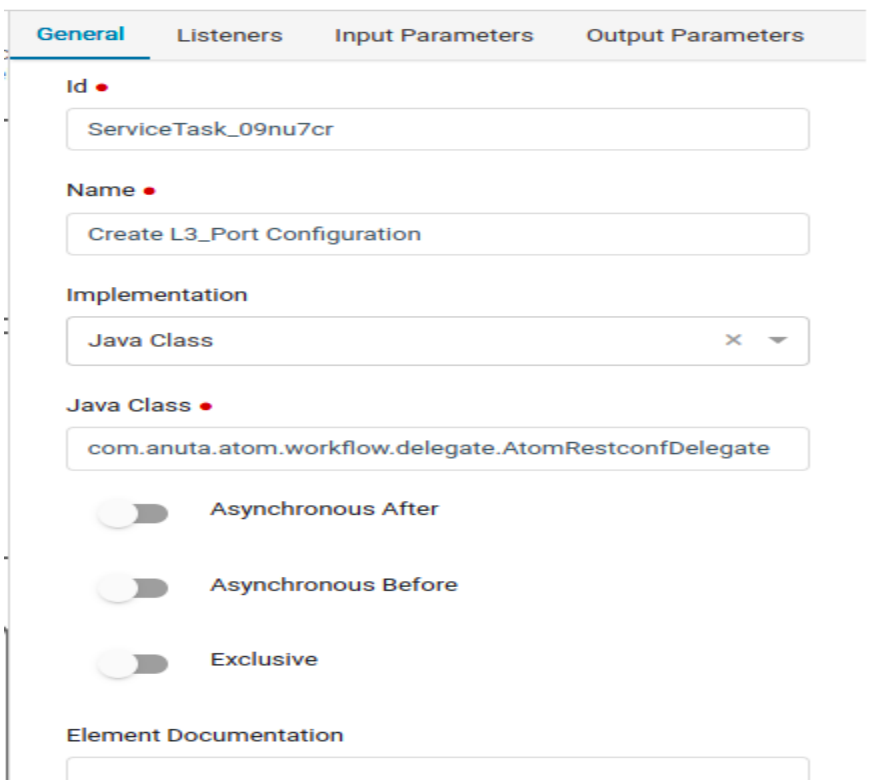

On the contrary, if an RPC call is made to ATOM then we need to use the below java class:  
“com.anuta.atom.workflow.delegate.AtomRpcDelegate”

The screenshot displays the 'General' tab of a workflow configuration interface. It features four tabs: 'General', 'Listeners', 'Input Parameters', and 'Output Parameters'. The 'General' tab is active, showing fields for 'Id' (ServiceTask\_0vt2jdq), 'Name' (Create\_RPCncx\_exec:ncx\_script\_execute), and 'Implementation' (Java Class). Below these, the 'Java Class' field is populated with 'com.anuta.atom.workflow.delegate.AtomRpcDelegate'. There are three toggle switches: 'Asynchronous After' (off), 'Asynchronous Before' (off), and 'Exclusive' (off). At the bottom, there is an 'Element Documentation' section with an empty text area.

General	Listeners	Input Parameters	Output Parameters
<b>Id</b>			
ServiceTask_0vt2jdq			
<b>Name</b>			
Create_RPCncx_exec:ncx_script_execute			
<b>Implementation</b>			
Java Class			
<b>Java Class</b>			
com.anuta.atom.workflow.delegate.AtomRpcDelegate			
<input type="checkbox"/> Asynchronous After			
<input type="checkbox"/> Asynchronous Before			
<input type="checkbox"/> Exclusive			
<b>Element Documentation</b>			

**POST needs the three parameters basically:**

- > URL - used for POST or GET or UPDATE operations
- > ACTION - Can be one of POST/GET/UPDATE
- > PAYLOAD (In case of GET this would be not required)

**ServiceTask\_1wd6m9q**

General Listeners **Input/Output** Field Injections Extensions

**Parameters**

**Input Parameters** x +

atom\_url : Script  
atom\_action : Text  
atom\_payload : Script

**Output Parameters** x +

L3\_Port\_output : Script

## RESTCONF Representation

URL:

**Add Task Input/Output Parameters** x

Category ● **TASK INPUT** TASK OUTPUT

Datatype ● TEXT **SCRIPT**

Name ● atom\_url

Add

General Listeners **Input Parameters** Output Parameters

**Add Input**

atom\_url script type :groovy [ ]

```

1  def deviceid=execution.getVariable("deviceid");
2  id(deviceid==null){
3      deviceid="172.16.5.106"
4  }
5  'controller:devices/device='+deviceid+'/configuration';

```

**ACTION:**

### Add Task Input/Output Parameters

Category

TASK INPUT

TASK OUTPUT

Datatype

TEXT

SCRIPT

Name

atom\_action

Add

GeneralListenersInput ParametersOutput Parameters

Add Input

atom\_url

script type :groovy

```
1 def deviceid=execution.getVariable("deviceid");
2 id(deviceid==null){
3     deviceid="172.16.5.106"
4 }
5 'controller:devices/device='+deviceid+'/configuration';
```

atom\_action

UPDATE

**PAYLOAD:**

### Add Task Input/Output Parameters

Category

TASK INPUT

TASK OUTPUT

Datatype

TEXT

SCRIPT

Name

atom\_payload

Add

General Listeners **Input Parameters** Output Parameters

**Add Input**

atom\_url script type :groovy

```
1 def deviceid=execution.getVariable("deviceid");
2 id(deviceid==null){
3     deviceid="172.16.5.106"
4 }
5 'controller:devices/device='+deviceid+'/configuration';
```

atom\_action

UPDATE

atom\_payload script type :groovy

```
1 def destipList=execution.getVariable("payload");
2 destipList;
```

Here we are forming a payload from the previous task “User Inputs” which is stored in output variable “payload”. So we used “execution.getVariable("payload");” to get the content and send it.

### **RPC Representation**

URL:

**Add Task Input/Output Parameters**

Category **TASK INPUT** TASK OUTPUT

Datatype **TEXT** SCRIPT

Name **atom\_url**

**Add**

General
Listeners
**Input Parameters**
Output Parameters

Add Input

atom\_url

**ACTION:**

Add Task Input/Output Parameters

Category
TASK INPUT
TASK OUTPUT

Datatype
TEXT
SCRIPT

Name
atom\_action


Add

General
Listeners
**Input Parameters**
Output Parameters

Add Input

atom\_url

atom\_action

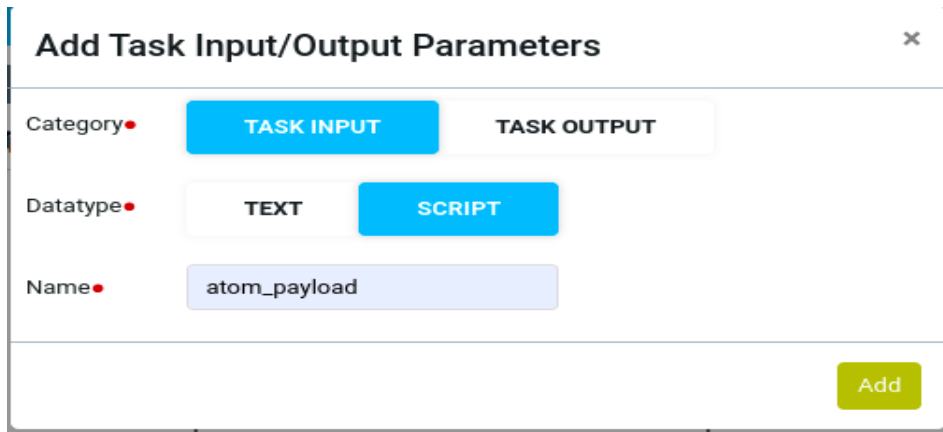**PAYLOAD:**


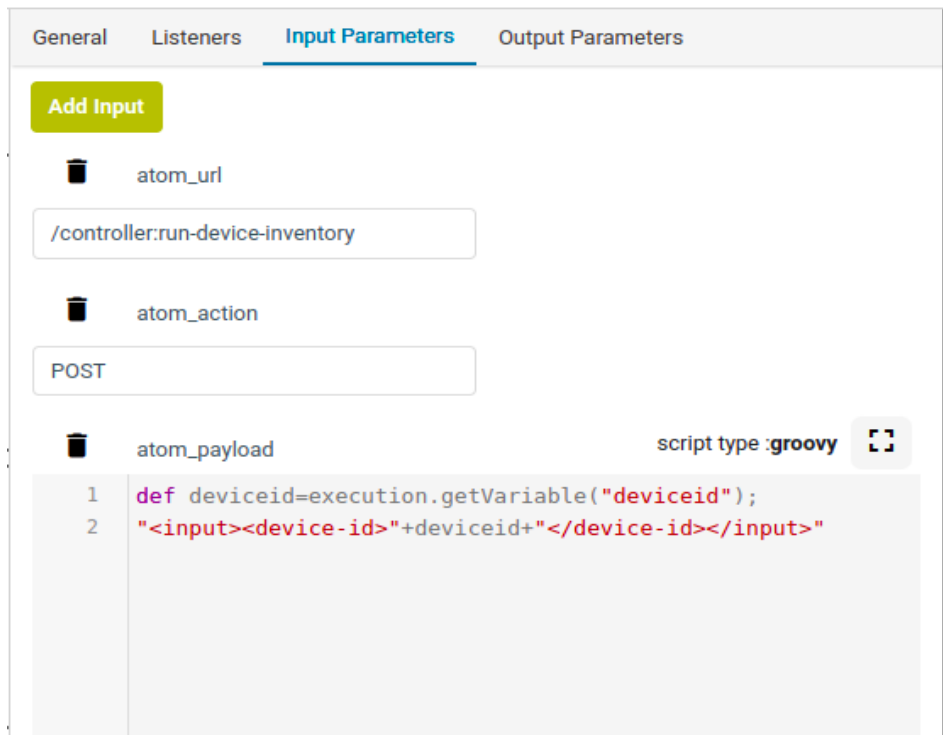
**Add Task Input/Output Parameters**

Category: **TASK INPUT** **TASK OUTPUT**

Datatype: **TEXT** **SCRIPT**

Name: **atom\_payload**

**Add**



General Listeners **Input Parameters** Output Parameters

**Add Input**

**atom\_url**  
/controller:run-device-inventory

**atom\_action**  
POST

**atom\_payload** script type: **groovy**

```

1 def deviceid=execution.getVariable("deviceid");
2 "<input><device-id>"+deviceid+"</device-id></input>"

```

**Output representation:**

After the RESTCONF call the output will be stored in the variable **"atom\_restconf\_output"**.  
On the contrary, for RPC calls the output will be stored in the variable **"atom\_rpc\_output"**.

### Add Task Input/Output Parameters

Category

TASK INPUT

TASK OUTPUT

Datatype

TEXT

SCRIPT

Name

L3\_Port\_output

Add

General

Listeners

Input Parameters

Output Parameters

Add Output

L3\_Port\_output

script type : groovy

1

def

L3\_Port\_output=execution.getVariable("atom\_rpc\_output");

2

L3\_Port\_output;

The variable which is at the end of the code block will be taken as the output variable of this task to the next task. In the above example we got the content and it will be stored in the output parameter "L3\_Port\_output".

## How Workflow Can Program Against Various Events in ATOM

ATOM platform publishes the following types of events

#	Type	Description	How to Subscribe
1	NAAS-EVENT	ATOM will generate an event based on the Rules defined such as License expiry or User login attempts and also Device events such as Syslog, SNMP traps are converted into a slightly enhanced format called NAAS-EVENT. Refer Administration → System → Rule Engine section in ATOM User Guide for Event generation.	A Delegate called <b>AtomRpcDelegate</b> is available to subscribe for these alerts by using <code>/rule-engine:execute-rule</code> RPC.
2	TSDB Alerts	Alert rules are submitted beforehand to the time series database(TSDB). When the conditions satisfy TSDB will publish an alert onto a workflow engine.	<p>A Delegate called <b>ATOMEventsSubscriptionDelegate</b> is available to subscribe for these alerts.</p> <p>This serves cases where a workflow needs to wait for a specific telemetry alert.</p> <p>A variation of this is possible. It is called CLA (Closed Loop Automation) where you can designate a process to be executed upon the occurrence of an alert.</p>

## Delegate Classes

Following Table summarizes various Network Automation activities and the target ATOM Delegate Classes to be used.

Type of Workflow Activity	Description	Delegate To Use
Execute a Direct CLI Command to Device	Direct CLI execution will bypass ATOM data model validations.	<a href="#">AtomRpcDelegate</a>
Execute a Direct API Command to Device	Direct API execution will bypass ATOM data model validations.	<a href="#">AtomRpcDelegate</a>

Execute an ATOM RPC	<p>ATOM RPCs are Actions available in ATOM.</p> <p>Example - Run a Diagnostic on the device</p>	<a href="#">AtomRpcDelegate</a>
Execute a RESTCONF against ATOM Data Model based APIs	<p>Activities that execute RESTCONF Operations against YANG Data model driven features like Device Model (Common Model, Native Device Model, or OpenConfig), Service Model or any other ATOM Features.</p> <p>Example - Create-VRF, Create-VLAN, etc.,</p>	<a href="#">AtomRestconfDelegate</a>
Activity to Wait/Act on an Event	<p>Activities involve waiting on a device event or any other asynchronous notification.</p> <p>Example - Waiting on SNMP Trap like Device Reboot, Wait on Interface Utilization Alert etc.,</p>	<a href="#">AtomEventsSubscriptionDelegate</a>
Activity to integrate into a 3rd Party connector	<p>Activities that bypass ATOM Device Management Layer and communicate with an end-point directly with 3rd Party provider APIs..</p>	<a href="#">http-connector</a>

## AtomRpcDelegate

This Delegate helps in creating Workflow Activities that execute CLI/API operations against the device or to invoke any ATOM RPCs. This bypasses ATOM Data Device/Other YANG Data model infrastructure like validations etc.,

Parameter	Sample-Value	Description
Java Class	com.anuta.atom.workflow.delegate.AtomRpcDelegate	Used to call Custom RPCs written by user
atom_action	POST	Sets the method of the Custom RPCs request
atom_url	/config-provision:execute-command	To execute any command on the device
	/config-provision:append-task-details	To append commands or any output to Task details for viewing in the specific task being executed.
	/rule-engine:execute-rule	To execute a rule and wait for an event.

	/developerutils:invoke-rest-driver-rpc	To interact with any API device such as RESTCONF/SOAP/NETCONF
atom_payload	<Valid XML Payload>	Sets the corresponding payload of the RPC call (check <a href="#">ATOM API Development and Testing Reference</a> for the expected payload based on RPC)

## AtomRestconfDelegate

This Delegate helps in creating Workflow Activities that executes RESTCONF Operations against YANG Data model driven features like Device Model (Common Model, Native Device Model, or OpenConfig), Service Model or any other ATOM Features.

Parameter	Sample-Value	Description
Java Class	com.anuta.atom.workflow.delegate.AtomRestconfDelegate	Used to execute atom defined Restconf calls
atom_action	GET/POST/UPDATE	Set the method of the Restconf request
atom_url	/controller:services/poc-service	Sets the URL of the Restconf call (check <a href="#">ATOM API Development and Testing Reference</a> for the expected URL based on YANG)
atom_payload	<Valid XML Payload>	Sets the payload of the Restconf Call (check <a href="#">ATOM API Development and Testing Reference</a> for the expected payload based on YANG)

**NOTE:** As the YANG models support is limited based on the vendor, we should make sure that Model or package is available in ATOM to perform any CRUD operations using ATOMRestConfDelegate.

## AtomEventsSubscriptionDelegate

Parameter	Sample-Value	Description
-----------	--------------	-------------

Java Class	com.anuta.atom.workflow.delegate.ATOMEventsSubscriptionDelegate	Used to wait for any event such as SNMP trap, Telemetry alert or any custom alert defined in ATOM
atom_notification_payload	<Valid XML Payload>	Sets the corresponding payload of the RPC call
atom_task_name	<any string>	Task name which resembles the alert and shown as part of ATOM tasks


## http-connector

Parameter	Sample-Value	Description
Connector ID	http-connector	Used to execute REST calls from ATOM workflow to external/third-party APIs
method	GET/POST/PUT/PATCH	Set the method of the REST request
url	/controller:services/poc-service	Sets the URL of the REST call
payload	<Valid XML Payload> {Valid JSON Payload}	Sets the payload of the REST Call

Other Headers as required by REST call can be added as input parameters like Authentication-tokens, Accept and Content-type Headers.

## Scripting support in ATOM workflow

ATOM workflow supports Groovy & Javascript as inline scripts and Python as external scripts. Sample groovy/python code written as part of workflow development can be tested in the workflow builder console.

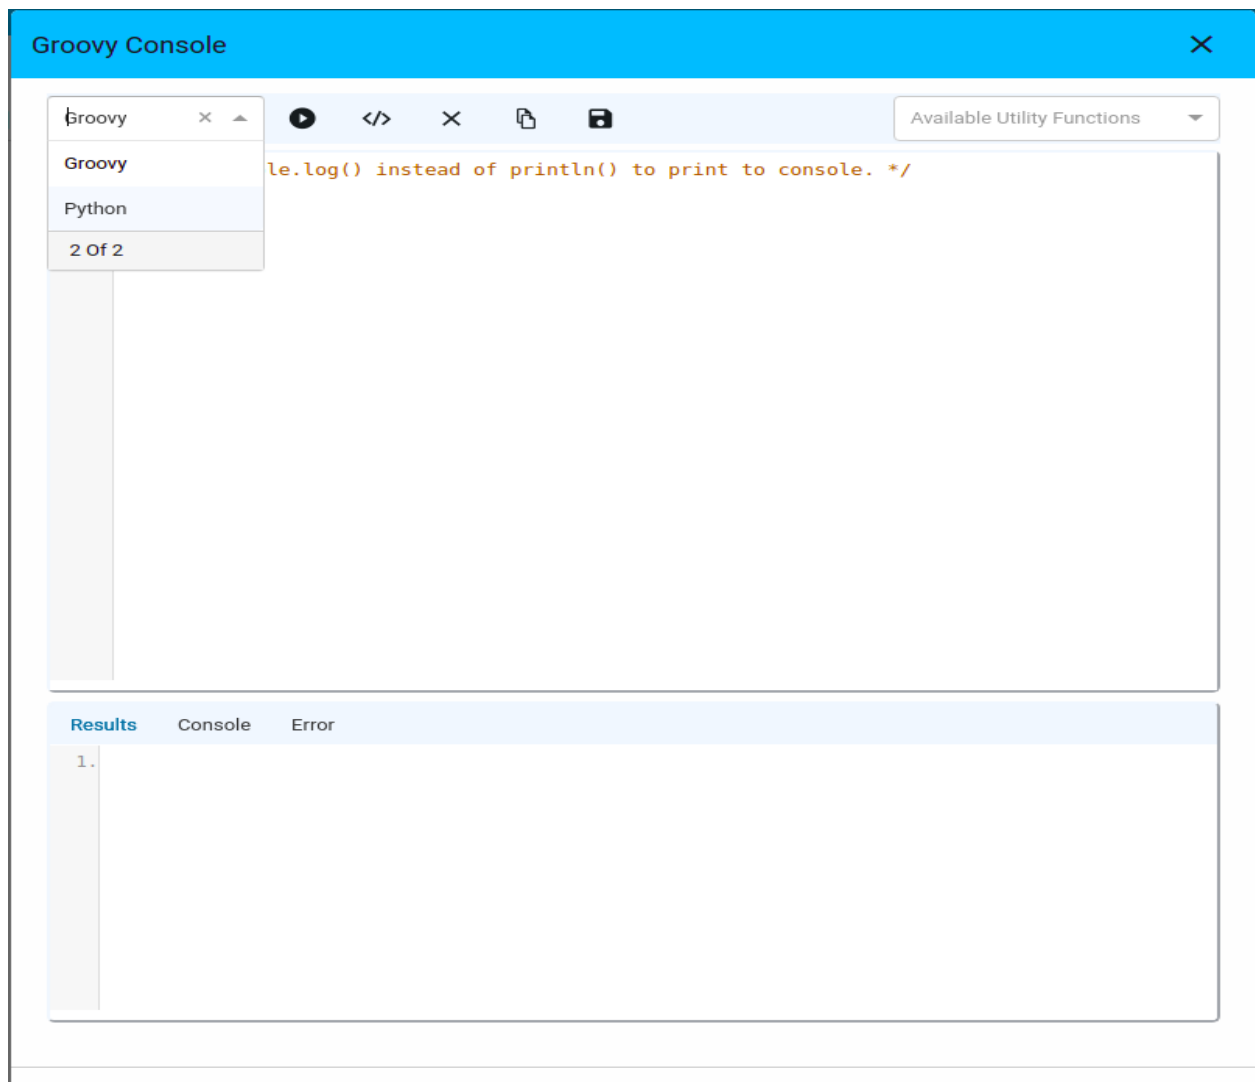

## External Python Code Invocation

### Procedure - 1 (Python2)

In the workflow Script Task by writing a Groovy code we can invoke the external python script

---

General	Input Parameters	Output Parameters
---------	------------------	-------------------

**Id** ●

ScriptTask\_0awgjak

**Name** ●

Execute Tenant Lifecycle

**Script Format** ●

Groovy

**Script Type**

**INLINE SCRIPT** **EXTERNAL RESOURCE**

**Script** ●

1	
---	--

#### Sample groovy code for invocation of external python script

```
import com.anuta.atom.workflow.scripts.Utils

def Command = '/usr/bin/python2.7
/tmp/atom/workflow/data/naas/ServicePackages/external-python/script_pyth
hon.py';

Utils.appendMessageToParentTask(execution,Command)

def sout = new StringBuffer();
def serr = new StringBuffer();

def process = Command.execute();
sleep(30000)
process.consumeProcessOutput(sout, serr);
sleep(30000)
process.waitForProcessOutput();
execution.setVariable("TLReturnValue", process.exitValue());
```

```
println "process exitValue was : ${process.exitValue()}";
println "error stream was : \n${serr.toString()}";
println "output stream was : \n${sout.toString()}";

if (TLReturnValue == 0) {
    Utils.setVariable(execution,"tenant_lifecycle_output", sout.toString())
}
else {
    Utils.setVariable(execution,"tenant_lifecycle_output", serr.toString())
}
```

In the python file at the end just before the return statement, add a print statement of the return value. That gets captured in sout. In case of any failures happening for python script invocation it gets captured in serr.

#### Sample content of script\_python.py

```
resp = 'Entered the python file\n'
print resp
```

We should place the script\_python.py file inside the scripts folder of package zip and then upload into ATOM and activate the package.

In this example, the package name is considered as external-python and */tmp/atom/workflow/data/naas/ServicePackages/external-python* is needed as the path before your python file since the package once activated in ATOM will be placed in that path.

### Procedure - 2 (Python3)

In the workflow Service Task by writing a Groovy code we can invoke the external python script

The python3 support is provided as a separate container running inside the atom-agent pod. All the packages deployed on the atom-agent will be synced to this container also. This will allow us to bundle custom python code in these packages.

The clients can use the following rpcs:

1. invoke-python-function
2. invoke-python-file
3. invoke-python-snippet
4. invoke-script-file
5. invoke-script-snippet

### Package structure

The python can be packaged as the regular atom package. The only extra configuration required is the flag **deploy-on-device-agent**. This should be set to true.

Example:

package.xml:

```
<package>
  <auto-start>true</auto-start>
  <deploy-on-agent>true</deploy-on-agent>
  <deploy-on-device-agent>true</deploy-on-device-agent>
  <description>model-yang-model Service Package
@servicePackageDescription@</description>
  <module-name>testpackage</module-name>
  <name>testpackage</name>
  <ncx-version>[10.0.0.0,)</ncx-version>
  <order>-1</order>
  <type>SERVICE_MODEL</type>
  <version>10.0.0.1</version>
  <donot-deploy-on-microservices>ATOM-Inventory-mgr</donot-deploy
-on-microservices>
  <donot-deploy-on-microservices>ATOM-Workflow-engine</donot-depl
oy-on-microservices>
</package>
```

### Python Code Execution

In this example, there is a package testpackage with the following structure:

```
testpackage
+ Scripts
+ test.py
```

- ssh\_and\_exec
  - test\_json\_function
  - sleep
- + script.py

### *invoke-python-function (single string arg)*

In this case, we can execute a python function using the 'module name' and the 'function name'.

#### Arguments:

The arguments can be passed as an encoded json array (or map in case of kwargs). If there is a single argument, we can pass it as a single argument.

#### Sample payload:

```
curl -u admin:admin -X POST -H 'Content-Type: application/xml' -H 'Accept: */*'
http://localhost:8080/restconf/operations/atom-scripting:invoke-python-function
--data-binary @/tmp/a.xml
```

```
<input>
  <module-name>testpackage.test</module-name>
  <function-name>ssh_and_exec</function-name>
  <arg-json>"172.16.3.40"</arg-json>
  <profile>Device_Communication3</profile>
</input>
```

In this example, we are invoking the function 'ssh\_and\_exec' from the module 'testpackage.test' module.

### *invoke-python-function (single int arg)*

#### Sample payload:

```
curl -u admin:admin -X POST -H 'Content-Type: application/xml' -H 'Accept: */*'
http://localhost:8080/restconf/operations/atom-scripting:invoke-python-function
--data-binary @/tmp/b.xml
```

```
<input>
  <module-name>testpackage.test</module-name>
  <function-name>sleep</function-name>
  <arg-json></arg-json>
  <profile>Device_Communication3</profile>
</input>
```

In this example, we are invoking the function 'sleep' from the module testpackage.test module.

### *invoke-python-snippet*

This will allow us to invoke any arbitrary python code on the container

```
curl -u admin:admin -X POST -H 'Content-Type: application/xml' -H 'Accept: */*'
http://localhost:8080/restconf/operations/atom-scripting:invoke-python-snippet
--data-binary @/tmp/c.xml
```

```
<input>
  <json-response>false</json-response>
  <snippet><![CDATA[
import paramiko

def ssh_and_exec(hostname):
    nbytes = 4096
    port = 22
    username = 'xxxxx'
    password = 'xxxxxxx'
    command = 'show version'

    client = paramiko.Transport((hostname, port))
    try:
        client.connect(username=username, password=password)

        stdout_data = []
        stderr_data = []
        session = client.open_channel(kind='session')
        try:
            session.exec_command(command)
            while True:
                if session.recv_ready():
                    buf = session.recv(nbytes).decode('utf-8')
                    stdout_data.append(buf)
                if session.recv_stderr_ready():
                    stderr_data.append(session.recv_stderr(nbytes))
                if session.exit_status_ready():
                    break

            print('stdout_data = %s' % (stdout_data))
            print('exit status: %s' % (session.recv_exit_status()))
            print(''.join(stdout_data))
            print(''.join(stderr_data))
        finally:
            session.close()
    finally:
```

```
        client.close()

ssh_and_exec('172.16.3.40')
]]></snippet>
    <profile>Device_Communication3</profile>
</input>
```

### ***invoke-python-file***

This is another variation of the invoke-python-function where the user may want to organize the code in different files. The file is supposed to implement a function 'main'.

The usage would be:

```
curl -u admin:admin -X POST -H 'Content-Type: application/xml' -H 'Accept: */*'
http://localhost:8080/restconf/operations/atom-scripting:invoke-python-file
--data-binary @/tmp/d.xml
```

```
<input>
    <package-name>testpackage</package-name>
    <file-name>script</file-name>
    <profile>Device_Communication3</profile>
</input>
```

### **Sample groovy code for invocation of external python script**

```
Atom_url -> /atom-scripting:invoke-python-function
Atom_action -> POST
Atom_payload ->
import com.anuta.atom.workflow.scripts.Utills
import com.anuta.message.CommonMessageHelper
def opt = ['server': <server>, 'username': <username>, 'password': <password>]
def json = CommonMessageHelper.getGson().toJson(opt)

def payload =
String.format("""<input><module-name>testpackage.test</module-name><function-name>execute_cmd</function-name><arg-json
hidden="true"><![CDATA[${json}]]></arg-json><profile>Device_Communication3</profile></input>""", json)
payload.toString();
```

Sample content of script\_python.py

```
import paramiko
def execute_cmd(opt):
    # Get values
    server = opt.get('server')
    username = opt.get('username')
    password = opt.get('password')

    try:
        # initialize the SSH client
        client = paramiko.SSHClient()
        # add to known hosts
        client.set_missing_host_key_policy(paramiko.AutoAddPolicy())
        client.connect(hostname=server, username=username,
            password=password)

        commands = [
            "esxcli network nic list",
            "esxcli software vib list | grep esx-base"
        ]


        # execute the commands
        for command in commands:
            print(command)
            stdin, stdout, stderr = client.exec_command(command, timeout=None)
            print(stdout.read().decode())
            err = stderr.read().decode()
            if err:
                print(err)

        # Close connection
        client.close()

    except Exception as e:
        print(e)
```

```
if __name__ == "__main__":  
    execute_cmd(opt)
```

To create a package refer ATOM SDK section and manual quick zip can be done by selecting the files like below if needed.

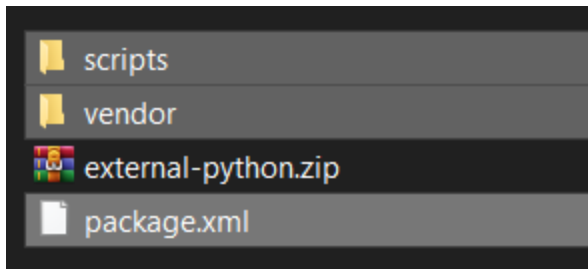

## Device Connection Timeout

Consider a scenario of a workflow task that has to copy the new software image from tftp-server to the device.

If the workflow task times out while still downloading the image, where the command did execute and complete on the device but the workflow timed out with below error.

*Error in device command execution no response from the device 10.92.33.64 in 60 seconds.last response from device : archive download-sw /imageonly /leave-old-sw /no-set-boot tftp://153.6.140.225/c2960s-universalk9-tar.152-2.E8.tar*

In the above, the limit of 60 sec is coming from the default value taken in the ATOM credential-set attached to the device 10.92.33.64. So increase the value of parameter **CLI Configure Command TimeOut** from 60 to 210 or so based on copy time taken in device.

## Handling larger responses from device

Consider a scenario of verifying the MD5 of the new software image on the device.

Lets say you execute the command which computes the MD5 hash and capture that response. Then if you try executing a .contains() function on the response to check whether the response contains the expected MD5 hash or not, you may see it to be not working sometimes.

**Output Parameter**

Name

md5\_match

✕

Type

Script

▼

Script Format

Groovy

✕

Script Type

Inline Script

▼

Script

```
def resp = execution.getVariable("atom_rpc_output");
def md5 = execution.getVariable("md5_of_image");
def out = resp.contains(md5);
out;
```

28/01/2020, 16:31:01 - 28/01/2020, 16:31:31

Time Taken : 29 seconds

TASKID : EDw6C-Xx1ITyam8Y23TdSuUA

2020/01/28 09:31:01 PM: POST http://atom-frontend:8890/app/restconf/operations/cisco\_swim:execute-command

2020/01/28 09:31:01 PM: **Request**

```
{
  "input": {
    "device-id": "10.92.33.64",
    "command": "verify /md5 flash:c2960s-universalk9-mz.152-2.E8/c2960s-universalk9-mz.152-2.E8.bin"
  }
}
```

```
2020/01/28 09:31:01 PM: interactive = true, pattern-needed = true, timeout = 2400, custom-response-patterns = false
```

```
2020/01/28 09:31:31 PM: {"successful":true,"response":"verify /md5 flash:c2960s-universalk9-mz.152-2.E8/c2960s-universalk9-mz.152-2.E8.bin
```

```
.....
verify /md5 (flash:c2960s-universalk9-mz.152-2.E8/c2960s-universalk9-mz.152-2.E8.bin) = 262e5da4a7440cc37b2e1d0cc2bad7d5
```

```
eitlab-anuta-2960-01-sw#}
```

```
2020/01/28 09:31:31 PM: OUTPUT is: verify /md5 flash:c2960s-universalk9-mz.152-2.E8/c2960s-universalk9-mz.152-2.E8.bin
```

```
.....
verify /md5 (flash:c2960s-universalk9-mz.152-2.E8/c2960s-universalk9-mz.152-2.E8.bin) = 262e5da4a7440cc37b2e1d0cc2bad7d5 eitlab-anuta-2960-01-sw#
```

This problem can occur if the response (resp) output is more than 2000 chars and getting auto converted as byte characters which would not match with md5 value which is type text. As a general practice use below code snippet where **Utils** converts that byte chars to text and it would work for matching with .contains()

**getVariable()**

```
import com.anuta.atom.workflow.scripts.Utils
```

```
def resp = Utils.getVariable(execution,"atom_rpc_output")
def md5 = Utils.getVariable(execution,"md5_of_image");
def out = resp.contains(md5);
Out;
```

### **setVariable()**

```
import com.anuta.atom.workflow.scripts.Utils
def resp=Utils.getVariable(execution,"atom_rpc_output")
Utils.setVariable(execution,"showipintbr", resp)
```

## **Commenting code**

Groovy & Javascript:

Single line comments can be done using //

Multi-liner comments can be done using /\* \*/

## **Error handling**

To avoid 'Incident error occurred' while running workflow we can use try-catch in the script block

This issue will see if not found variable declaration or some script issues

```
import com.anuta.atom.workflow.scripts.Utils;

try {
    <logic block>
}
catch(Exception ex) {
    def data = "Error in <task name>";
    Utils.appendMessageToParentTask(execution,data,"true")
}
```

## **Custom form fieldTypes in ATOM workflow**

Below section describes how Workflow end-user Input forms can be enhanced by using various customer fieldTypes during workflow development.

1. An User can define workflow custom field types under the Metadata Properties section. Add a property and fill 'Id' as 'fieldType' and 'Value' as one among the custom field types possible for a given Type as described below.

- Below are the workflow custom form field types supported under Type 'string'

Type: 'string' and Property: <Id: fieldType> <Value: below custom field types>

cidr  
ipaddress  
multiLineString  
leafRef  
multiSelect  
Filter  
whenstmt

- Below are the workflow custom form field types supported under type 'long'




Type: 'long' and Property: <Id: fieldType> <Value: below custom field types>

int8  
int16  
int32  
int64  
uint8  
uint16  
uint32  
uint64  
decimal64  
Password  
readonly

- For grouping of fields in the form, you can use 'groupBy' as the property Id and Value as required group name which shows up as Title

## Examples for custom fieldTypes

- Examples for cidr, ipaddress, multiLineString, int8, int64, uint8, decimal64, etc.

General	Listeners	Input Parameters	Output Parameters	Form
<div>Add FormField</div>				
Form Key		custom		
Form Builder Data		Display form builder forms ▼		
<div>cidr</div> <div>Valid CIDR (A.B.C.D/E for e.x: 172.16.1.1/24)  </div> <div>string</div>				

Create form field ×

Form Field

ID ●

cidr

Label ●

Valid CIDR (A.B.C.D/E for e.x: 172.16.1.1/24)

Type ●


string ▼

Default Value

1.1.1.1/24

Metadata Properties +

fieldType ▼

cidr 

Constraints +

Reset

Add

## 2. Examples for leafRef, multiSelect

For these custom types we need to add extra properties named yangPath, bindLabel, bindValue

yangPath → Defines the yang schema path

Eg: /controller:devices/device/interfaces/interface

bindLabel → value (does not change)

bindValue → This is the yang **key/non-key leaf** in that specific yangPath

**Note :**

- 1) **bindLabel** and **bindValue** are required when we want to show other than key values in the yang
- 2) As defined above **bindValue** will vary based on the key/non-key leaf in the respective yangPath.
- 3) Schema-browser can help in understanding what is the yang key leaf for a particular schema yangPath.

**leafRef**

The screenshot shows the 'Form' tab of the ATOM Form Builder. At the top, there are tabs for 'General', 'Listeners', 'Input Parameters', 'Output Parameters', and 'Form'. Below the tabs is a yellow 'Add FormField' button and a trash icon. The 'Form Key' is set to 'custom'. The 'Form Builder Data' dropdown is set to 'Display form builder forms'. Below this, there are two form fields:

- cidr**: Valid CIDR (A.B.C.D/E for e.x: 172.16.1.1/24), string type. It has edit and delete icons.
- leafRef**: select device from dropdown, string type. It also has edit and delete icons.

**Form Field**

ID●

leafRef

Label●

select device from dropdown

Type●

string


▼

Default Value

**Metadata Properties +**


fieldType ▼

leafRef










yangPath ▼

/controller:devices/device



**Constraints +**

## multiSelect

General	Listeners	Input Parameters	Output Parameters	Form
<b>Add FormField</b>				
<b>Form Key</b>		custom		
<b>Form Builder Data</b>		Display form builder forms ▼		
<hr/>				
<b>cidr</b> Valid CIDR (A.B.C.D/E for e.x: 172.16.1.1/24) string		 		
<b>leafRef</b> select device from dropdown string		 		
<b>multiSelect</b> select multiple values from dropdown string		 		

**Create form field**

**Form Field**

ID • multiSelect

Label • select multiple values from dropdown

Type • string

Default Value

**Metadata Properties +**

fieldType ▼ multiSelect

yangPath ▼ /controller:devices/device

**Constraints +**

Reset Add

### 3. Examples for properties `dynamicValueStmt`, `whenstmt`, `readonly`, `password`

For these custom types we need to add extra properties `yangPath`, `bindLabel`, `bindValue`

**dynamicValueStmt** - Fetching Interfaces under a selected device example

This helps in showing a filtered set of drop-down values dynamically at run-time based on other form field values selected .

With `bindValue` and `bindLabel`

**Metadata Properties +**

fieldType ▼ leafRef

yangPath ▼ /controller:devices/device/interface:interfaces/interfa

dynamicValueS ▼ /controller:devices/device[id=current()]/leafRef]/interfa

bindLabel ▼ value

bindValue ▼ long-name

`fieldType` → `leafRef`

`yangPath` → `/controller:devices/device/interface:interfaces/interface`

```
dynamicValueStmt →  
/controller:devices/device[id=current()/device]/interface:interfaces/interface/long-name  
bindLabel → value  
bindValue → long-name
```

The usage of `current()/device` indicates to filter interfaces drop-down values to show only interfaces related to that particular device value given as input in other form fields.

If your other workflow form parameter name is `device_id` and we need interfaces to be displayed for the previous chosen `device_id` form parameter, the `dynamicValueStmt` will be below

```
dynamicValueStmt →  
/controller:devices/device[id=current()/device_id]/interface:interfaces/interface/long-name
```

In this example `bindValue(long-name)` is the key leaf of the `yangPath(/controller:devices/device/interface:interfaces/interface)` and `bindLabel(value)` is the value of the key element.

**Without bindValue & bindLabel** - Fetching devices present in a Resource pool example

General

Listeners

Input Parameters

Output Parameters

Form

Add FormField

Form Key

custom

Form Builder Data

Display form builder forms

cidr

Valid CIDR (A.B.C.D/E for e.x: 172.16.1.1/24)

string

leafRef

select device from dropdown

string

multiSelect

select multiple values from dropdown

string

resource\_pool

select resource pool from dropdown

string

Create form field

Form Field

ID

resource\_pool

Label

select resource pool from dropdown

Type

string

Default Value

Metadata Properties

fieldType

leafRef

yangPath

/resourcepool:resource-pools/resource-pool

Constraints

Reset

Add

dynamicValueStmt ->

/resourcepool:resource-pools/resource-pool[name=current()/resource\_pool]/device/id

The screenshot shows the 'Form' tab of a workflow editor. It features a tabbed interface with 'General', 'Listeners', 'Input Parameters', 'Output Parameters', and 'Form'. The 'Form' tab is active, displaying a list of form fields. At the top, there is a yellow 'Add FormField' button and a 'Form Key' dropdown set to 'custom'. Below this is a 'Form Builder Data' dropdown set to 'Display form builder forms'. The list of form fields includes:

- leafRef**: select device from dropdown (string)
- multiSelect**: select multiple values from dropdown (string)
- resource\_pool**: select resource pool from dropdown (string)
- resource\_pool\_devices**: select resource pool devices from dropdown (string)

The screenshot shows the 'Create form field' dialog box. It has a title bar with a close button (X). The dialog is divided into several sections:

- Form Field**: Contains fields for ID (resource\_pool\_devices), Label (select resource pool devices from dropdown), Type (string), and Default Value (empty).
- Metadata Properties**: Contains a list of properties:
  - fieldType: leafRef
  - yangPath: /resourcepool:resource-pools/resource-pool
  - dynamicValueS: :source-pool[name=current()/resource-pool]/device/id
- Constraints**: A section with a plus sign to expand it.

At the bottom right, there are 'Reset' and 'Add' buttons.

### whenstmt

Using whenstmt a particular workflow form field can be hidden or displayed based on other form field input given.

Usage:

whenstmt → @<form-field-name> == <id of enum>







We can use logical operators like ||, &&

Ex : Display form field only when enumeration is not equal to test2 and enumeration1 is equal to Value\_3brgg9e

@enumeration != "test2" && @enumeration1 == "Value\_3brgg9e"

#### Enum Values +

test1	cisco	
test2	arista	
test3	anuta	
Value_2gtsjad	juniper	

General	Listeners	Input Parameters	Output Parameters	Form
<div> <div>Add FormField</div> <div> <div>Form Key</div> <div>custom</div> </div> <div> <div>Form Builder Data</div> <div>Display form builder forms</div> </div> </div>				
<div> <div>enumeration</div> <div>enum</div> </div>			<div> <div></div> <div></div> </div>	
<div> <div>enumeration1</div> <div>enum</div> </div>			<div> <div></div> <div></div> </div>	
<div> <div>cidr</div> <div>Valid CIDR (A.B.C.D/E for e.x: 172.16.1.1/24)</div> <div>string</div> </div>			<div> <div></div> <div></div> </div>	

### Create form field ✕

**Form Field**

ID •

cidr

Label •

Valid CIDR (A.B.C.D/E for e.x: 172.16.1.1/24)

Type •

string ▼

Default Value

1.1.1.1/24

**Metadata Properties** +

fieldType ▼

cidr

whenStmt ▼

@enumeration != "test2" && @enumeration1 != "Value.

**Constraints** +

Reset

Add

**readonly**

**User\_Inputs**

General

Forms

Listeners

Input/Output

Extensions

**Forms**

Form Key

custom

Form Fields

date

union

allowedValues

password

readonly

**Form Field**

ID

readonly

Type

string

Label

Readonly

Default Value

anuta

**Validation**

Add Constraint 

+

**Properties**

Add Property 

+

Id	Value
disabled	true

## Password

General
Listeners
Input Parameters
Output Parameters
Form

Add FormField

Form Keycustom

Form Builder DataDisplay form builder forms

**readonly**  
**Readonly**  
string

**password**  
**Provide password**  
string

Create form field

**Form Field**

ID •password

Label •Provide password

Type •string

Default Value

**Metadata Properties +**

fieldType •password

**Constraints +**

ResetAdd

## Validations/Constraints for custom form fields

1. Validation for Type “string” can be added as below

The screenshot shows the 'Form' tab of a configuration interface. At the top, there are tabs for 'General', 'Listeners', 'Input Parameters', 'Output Parameters', and 'Form'. Below the tabs is a yellow 'Add FormField' button. Underneath, there are fields for 'Form Key' (set to 'custom') and 'Form Builder Data' (set to 'Display form builder forms'). A list of form fields is shown below, with one field named 'string' having the label 'Value can be anything' and the type 'string'. To the right of this field are edit and delete icons.

The screenshot shows the 'Create form field' dialog box. It has a title bar with a close button. The main content is divided into sections: 'Form Field' with fields for 'ID' (string), 'Label' (Value can be anything), 'Type' (string), and 'Default Value' (test); 'Metadata Properties' (expanded); and 'Constraints' (expanded). The 'Constraints' section has three rows: 'minLength' (5), 'maxLength' (10), and 'required' (Value). Each row has a dropdown menu and a trash icon. At the bottom right are 'Reset' and 'Add' buttons.

- Validation for Type “long” can be added as below

General
Listeners
Input Parameters
Output Parameters
Form

Add FormField

Form Keycustom

Form Builder DataDisplay form builder forms

long

Value can be number

long

Create form field

Form Field

IDlong

LabelValue can be number

Type
long

Default Value

Metadata Properties

Constraints

min5

max10


requiredValue

## ATOM SDK

### Introduction


ATOM Software Development Kit (SDK) provides a gradle-based plugin **Package-Plugin jar** that serves as a backbone for any package development in ATOM. ATOM SDK provides CLI and also integrates into IDE like IntelliJ. The plugin enables you to perform the following tasks of Services/Drivers/MOP Development process in ATOM:

- Develop device packages
- Develop service packages (Includes Workflow/MOP)
- Compile, validate, generate device and service packages
- Load Packages to ATOM
- Upgrade of Packages

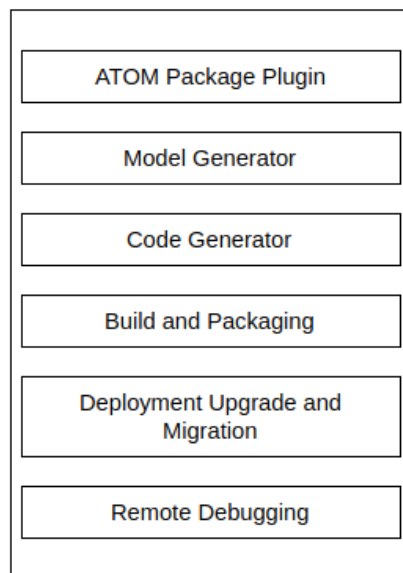

### ATOM SDK folder hierarchy

Unzip the contents of the ATOM SDK zip to view the following folder structure:.

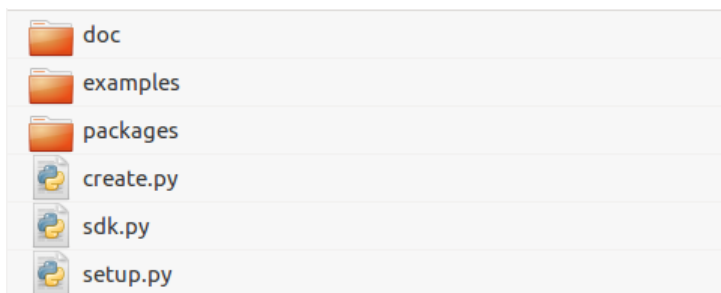

- **doc** - This folder contains README and the plugin documentation.
- **examples** - This folder has package zip files for different types of packages.
- **packages** - The core Package Plugin jar is part of the packages folder, which also has a

few more library and base dependency packages required for development of new devices and service packages.

- *create.py*, *sdk.py*, *setup.py* - These are the python files required for setting up device and service packages environment.

## Setting up the environment for ATOM Package Plugin

ATOM Package Plugin supports multiple gradle tasks that help create an environment suited for developing packages. These tasks can be triggered from an **IDE or CLI**.

For the plugin tasks to run, ensure that the prerequisites are met with.

### Prerequisites

To setup the environment, you must ensure that the following software requirements are met:

1. Python (2.7.12)
2. Python setup tools
3. Python Pip and Python modules bitarray, cmd2, TAPI, XEGGER
4. Pyang(1.7.8). Refer Appendix section for the details of [pyang installation](#).
5. JAVA (java 1.8 or greater)
6. Gradle

For information about installing gradle in your environment, visit <http://gradle.org>.

### Setting up the environment in Ubuntu

1. Execute the following commands:

```
sudo apt-get install python python-setuptools
sudo easy_install pip
sudo pip install bitarray
sudo pip install cmd2
sudo pip install tapi
sudo pip install xeger
sudo pip install requests
```

2. Install Oracle JDK for Linux and unzip it.

Set the JAVA\_HOME environment variable pointing to jdk directory.

3. Install gradle by executing the following command:

```
sudo apt-get install gradle
```

### Setting up the environment in Windows

1. Download get-pip.py from <https://bootstrap.pypa.io/get-pip.py>
2. Execute the following command: `python get-pip.py`
3. Install Visual C++: <https://www.microsoft.com/en-us/download/details.aspx?id=44266>

4. Execute the following commands in the following order:

```
pip install setuptools --upgrade
pip install bitarray
pip install cmd2
pip install tapi
pip install xeger
pip install requests
```

5. Set the JAVA\_HOME environment variable pointing to jdk directory.

Example: **C:\Program Files\Java\jdk1.8.0\_91**

NOTE: Proper installation of gradle can be verified by using the command *gradle -version*.

6. Gradle Installation in windows

Step 1. <https://gradle.org/releases/> get the latest Gradle distribution

Step 2. Unpack the distribution zip

Step 3. Configure your system environment **Path** variable

For e.x: **C:\Gradle\gradle-4.10.2\bin.**

Step 4. Verify your installation

Open a console (or a Windows command prompt) and run **gradle -v** to run gradle and verify the version, e.g.:

```
$ gradle -v
```

```
-----
Gradle 4.10.2
```

## Setting up the repository for developing packages

In ATOM SDK, the **sdk.py** script sets up the SDK plugin environment for creating various packages. To setup the repository of your choice, follow the steps as outlined below:

```

root@User:/home/supritha/Desktop/AtomSDK/atom-package-plugin# python sdk.py -h
Usage: to setup the repo and create new packages
command to run:
python sdk.py [options]

Options:
  -h, --help, --h           displays help command options
  -c, --createpackage, --c   This helps you to create the different types of
                             package like SERVICE package,DEVICE package and DEVICE
                             DRIVER package etc: SHOULD RUN ONLY AFTER SETUP
                             COMMAND FOR THE FIRST TIME commands like python sdk.py
                             [-c] or [--c] or [--createpackage]
  -s, --setup, --s          This Script will help you setup repository for core-
                             dependent packages commands like python sdk.py [-s]
                             or [--s] or [--setup]

```

1. Run the command: `python sdk.py -s`

This command runs the **setup.py** script which setups an environment for packages repository.

**setup.py** - This script is used to setup repositories for core-dependent packages. The core-dependent packages are present inside the “packages” folder and are necessary for developing new device and service packages.

2. Select the repository of your choice.

You can either set up a local repository or can publish the core-dependent packages to an artifact repository such as Nexus.

```

root@User:/home/supritha/Desktop/AtomSDK/atom-package-plugin# python sdk.py -s
Running setup script
This script sets up repository for core-dependent packages

select the repository of your choice
1> Maven
2> Flat directory
enter your choice: 

```

- **Local Repository (Flat Directory Structure)** : This option enables you to copy the core-dependent packages present in the “packages” folder to a flat directory.
- The absolute path of this particular flat directory, for example, “/home/” as shown below. (verify that this folder is present already)

```

root@User:/home/supritha/Desktop/AtomSDK/atom-package-plugin# python sdk.py -s
Running setup script
This script sets up repository for core-dependent packages

select the repository of your choice
1> Maven
2> Flat directory
enter your choice: 2
enter the absolute directory path to copy the dependent packages (optional) : /h
ome/supritha/Desktop/AtomSDK/atom-package-plugin/dependencies
/home/supritha/Desktop/AtomSDK/atom-package-plugin/dependencies

```

- **Maven Artifact Repository** : This option enables the user to copy the core-dependent packages in the “packages” folder uploaded to the artifact repository, for example Nexus.

```
root@User:/home/supritha/Desktop/AtomSDK/atom-package-plugin# python sdk.py -s
Running setup script
This script sets up repository for core-dependent packages

select the repository of your choice
1> Maven
2> Flat directory
enter your choice: 1
Enter the maven repository URL: █
```

After setting up the repository, the script generates a **config.xml** file. This file contains two tags:

- a) **repo-type** : Maven or Flat Directory
- b) **repo-path** : The absolute path or URL of the directory.

The metadata present in the *config.xml* is important to run the subsequent scripts.

Let us take the example of the selected repository as the Flat Directory(a local repository) and the steps to be followed are illustrated below:

1. Enter the IP address of ATOM

```
root@User:/home/supritha/Desktop/AtomSDK/atom-package-plugin# python sdk.py -s
Running setup script
This script sets up repository for core-dependent packages

select the repository of your choice
1> Maven
2> Flat directory
enter your choice: 2
enter the absolute directory path to copy the dependent packages (optional) :

Proper directory path was not provided. Assuming packages directory as the default dependency directory

Enter the atom host ip of the atom instance to be used for developing packages.
atom instance ip = 127.0.0.1
Enter the username of the atom instance : admin
Enter the password of the atom instance : admin█
```

If port is required for accessing the ATOM application then mention that as well. E.g:  
172.16.1.10:30443, 127.0.0.1:8890

2. Enter the credentials to login into ATOM

```

root@User:/home/supritha/Desktop/AtomSDK/atom-package-plugin# python sdk.py -s
Running setup script
This script sets up repository for core-dependent packages

select the repository of your choice
1> Maven
2> Flat directory
enter your choice: 2
enter the absolute directory path to copy the dependent packages (optional) :


Proper directory path was not provided. Assuming packages directory as the default dependency directory

Enter the atom host ip of the atom instance to be used for developing packages.
atom instance ip = 127.0.0.1
Enter the username of the atom instance : admin
Enter the password of the atom instance : admin
root@User:/home/supritha/Desktop/AtomSDK/atom-package-plugin#

```

After the successful setup process, the following files and folders are generated :

- *global.properties* - contains the username, password and ATOM ip which will be used in the package development process.
- *config.xml* - contains the information of repo-type and path to dependencies.
- **dependencies** - The dependency packages for development of device and service models are copied to the destination folder of your choice.

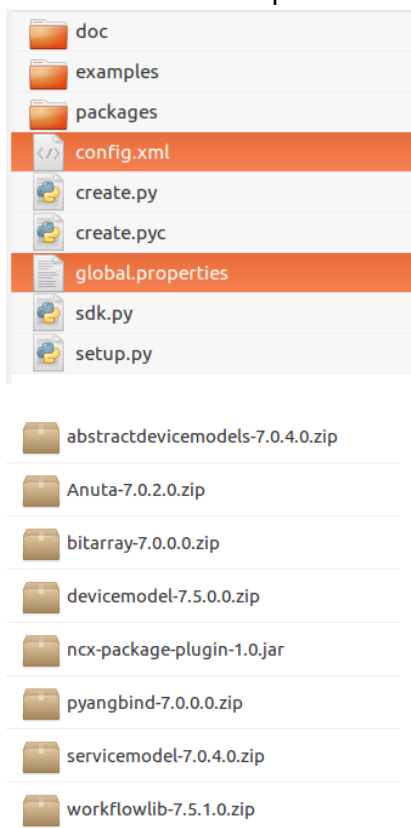

**IMPORTANT:** Do not delete these files or folders.

## Migration of Workflows

As seen in the above section workflows are deployed in atom by packaging them with the help of sdk. We can upgrade the package by changing the version in package.xml file. Atom automatically deploys the latest workflow version.

### Key Points to Remember

- Only the latest workflow deployed can be started from Atom.
- Old running workflow instances continue to run on older versions.
- Atom maintains the history of all old workflow instances in workflow instances tab.

## ATOM API Development and Testing Reference

Please refer to section ***Tools for API Development and Testing*** in **ATOM API Guide**

## References

Entry	Description	Reference
YANG	YANG is a data modeling language used to model configuration data, state data, Remote Procedure Calls, and notifications for network management protocols.	<a href="https://tools.ietf.org/html/rfc7950">https://tools.ietf.org/html/rfc7950</a>
RESTCONF	An HTTP-based protocol that provides a programmatic interface for accessing data defined in YANG	<a href="https://tools.ietf.org/html/rfc8040">https://tools.ietf.org/html/rfc8040</a>
Gradle	Gradle helps teams build, automate and deliver better software, faster.	<a href="https://gradle.org/">https://gradle.org/</a>
BPMN	Business Process Model and Notation (BPMN) is the global standard for process modeling and one of the most important components of successful Business-IT-Alignment.	<a href="https://www.omg.org/spec/BPMN/2.0/">https://www.omg.org/spec/BPMN/2.0/</a>
DMN	DMN is a modeling language and notation for the precise specification of business decisions and business rules. DMN is easily readable by the different types of people involved in decision management.	<a href="https://www.omg.org/dmn/">https://www.omg.org/dmn/</a>

